
Start with one dwelling: Unit A / 107


Modeled supply pipes and fixture connections from P4.01. Colors: blue cold, orange hot, green circulation return. Geometry is editable; routes and heights still need dimensional verification.

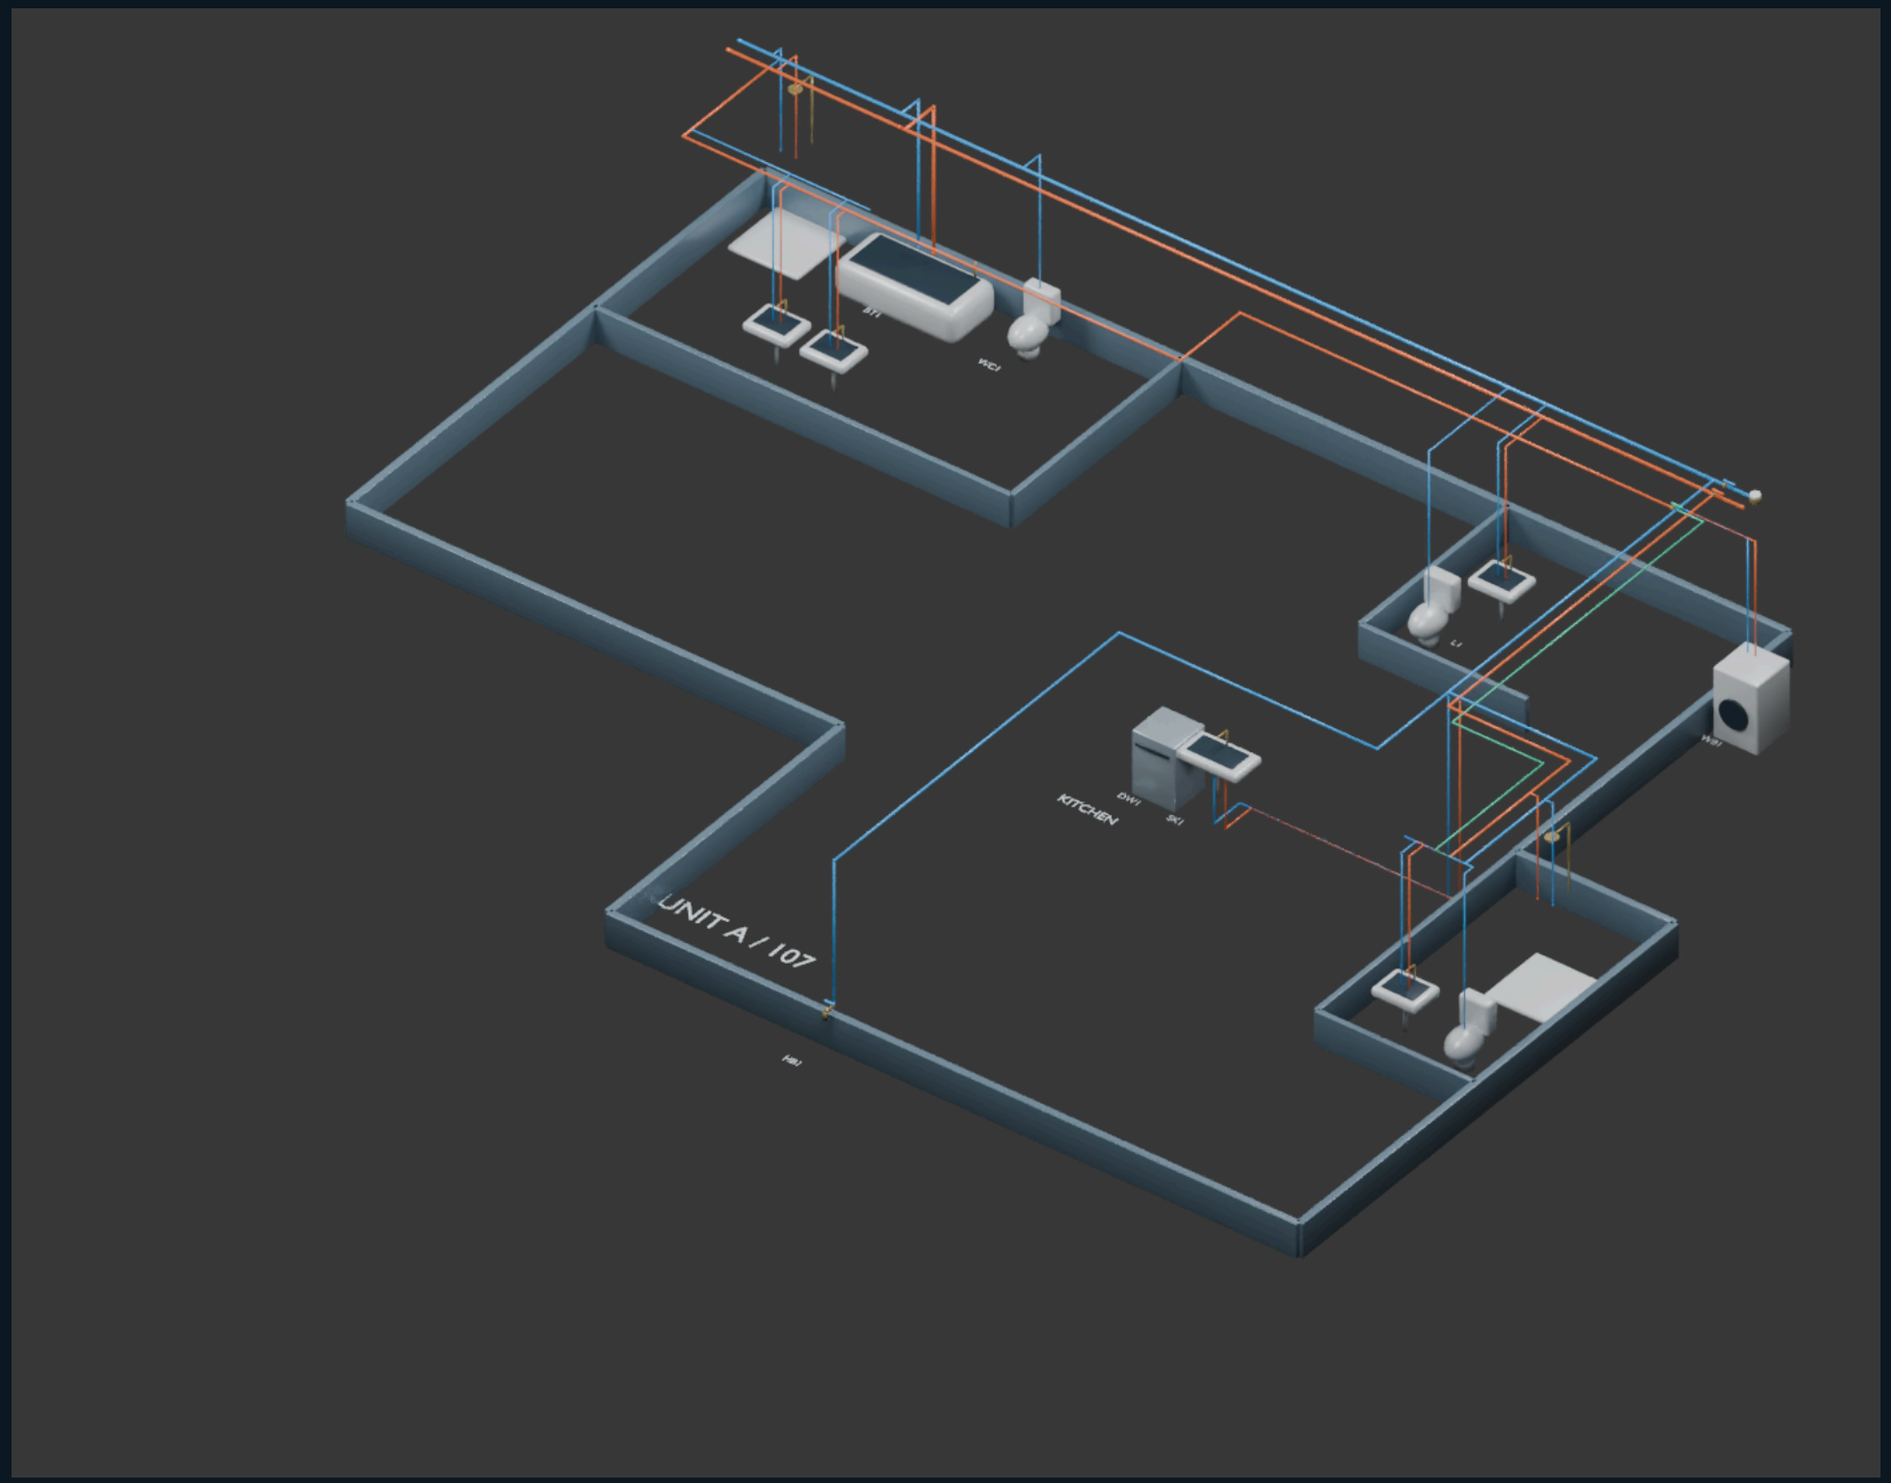

HIGHLAND / DOMESTIC WATER

Check the route before extending the model


Overlay generated from the 3D specification, projected back onto the source crop. Kitchen underfloor path and exact loop joins remain assumptions. This is a visual review, not a measured overlay or a passed dimensional check.

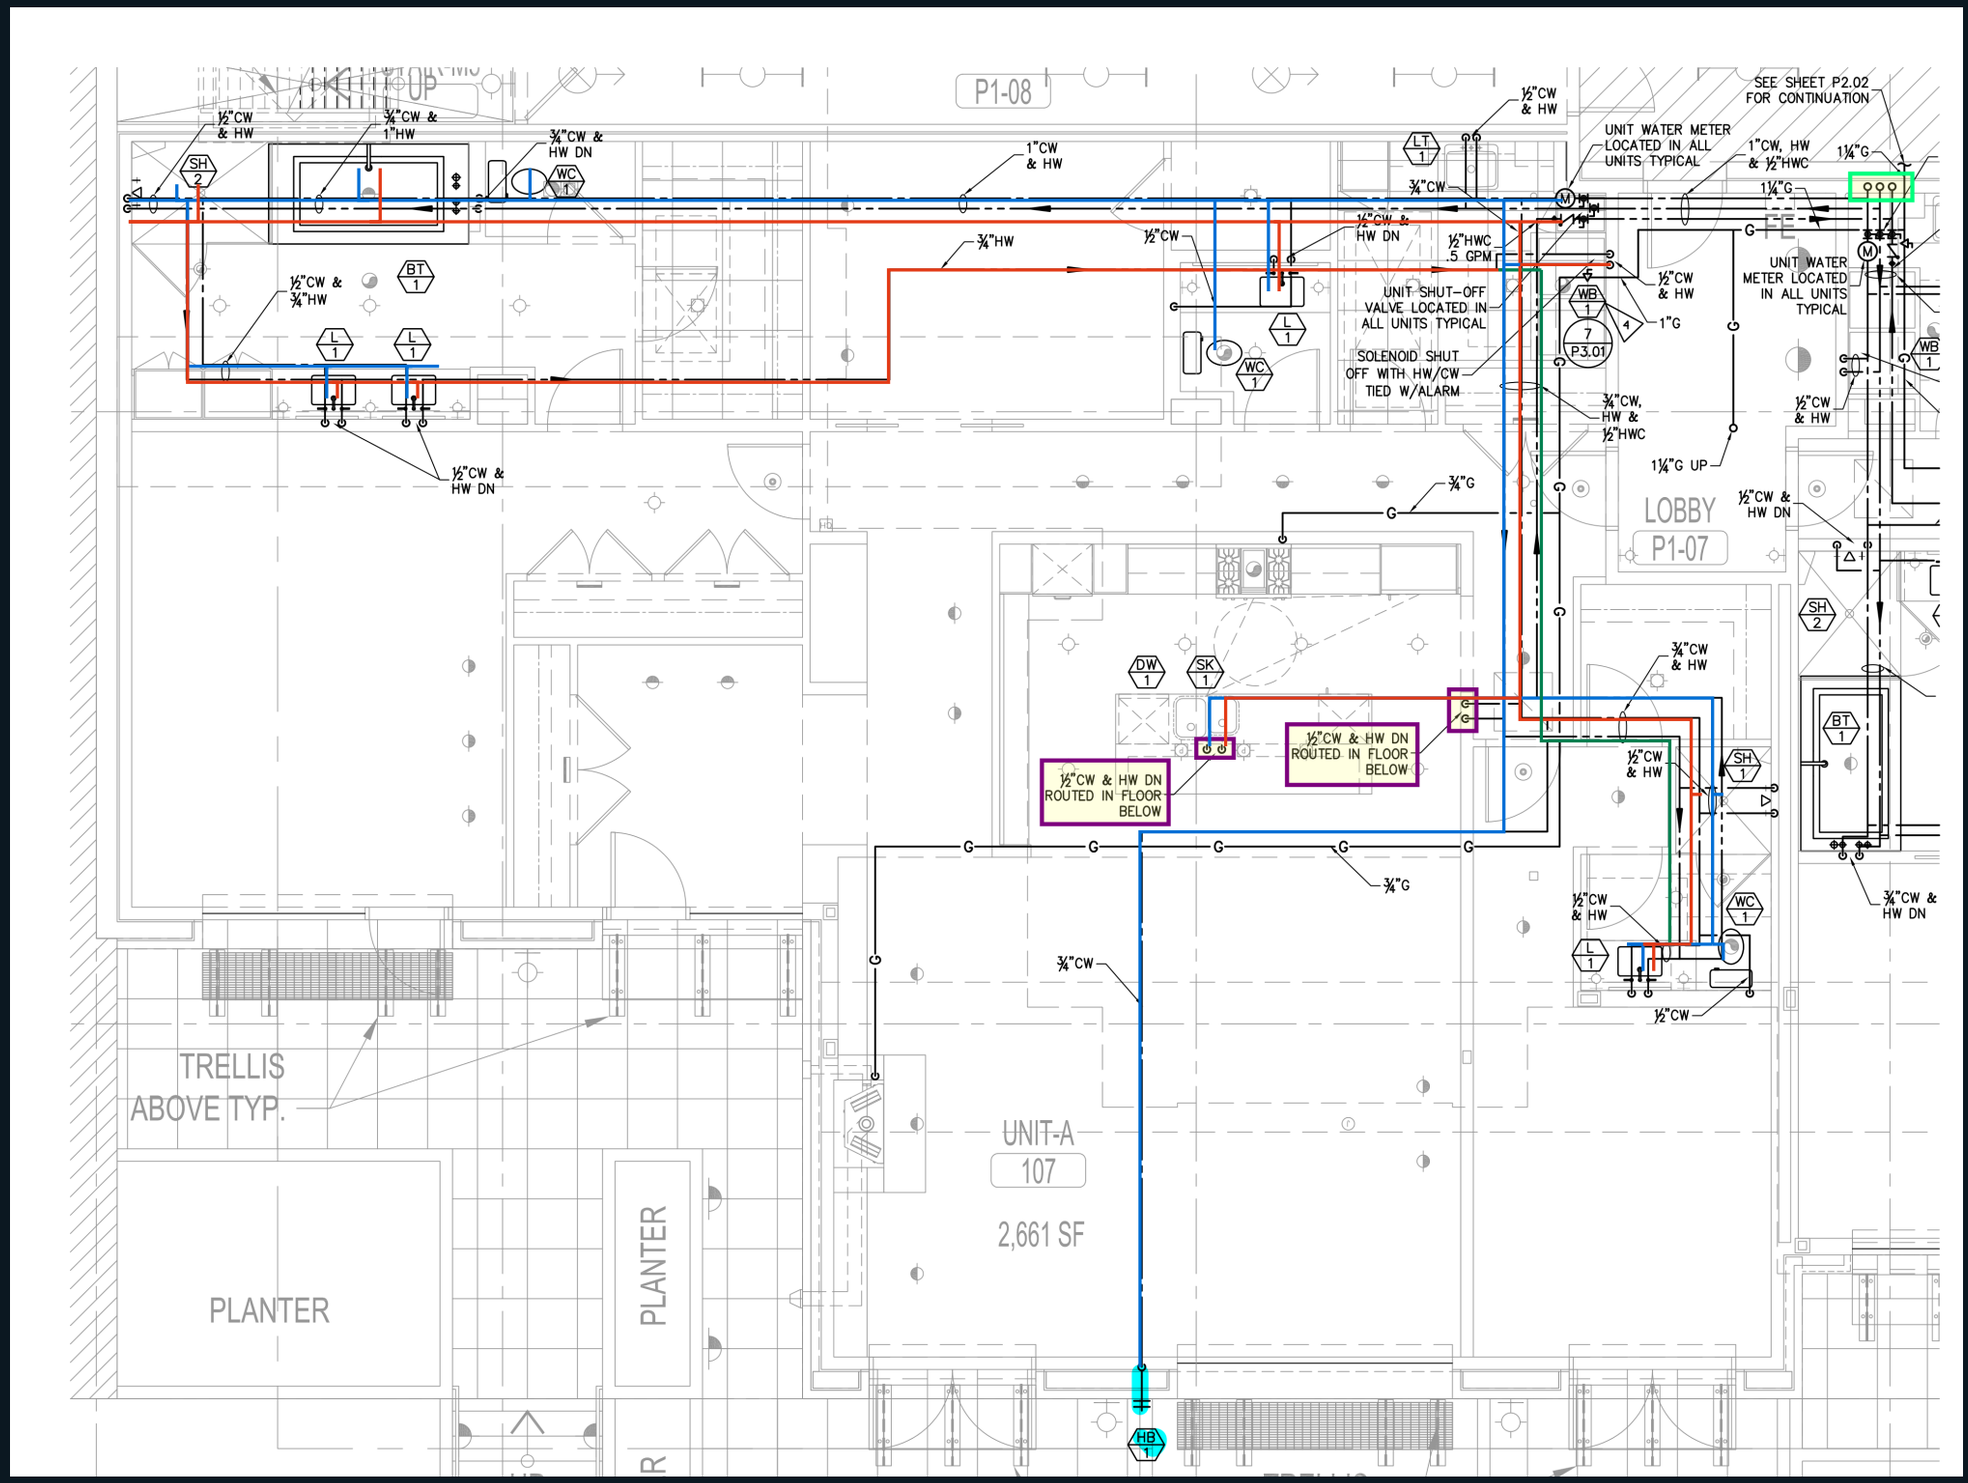

DRAWING-BASED MODEL STUDY | Positions and envelopes assumed. Not an as-built or construction document.


The shared network

P3.02 supports five labeled stack groups. The 03 group stops below R5; the 04 group has no resolved R1 dwelling branch. Layout and floor elevations in this view are presentation assumptions.

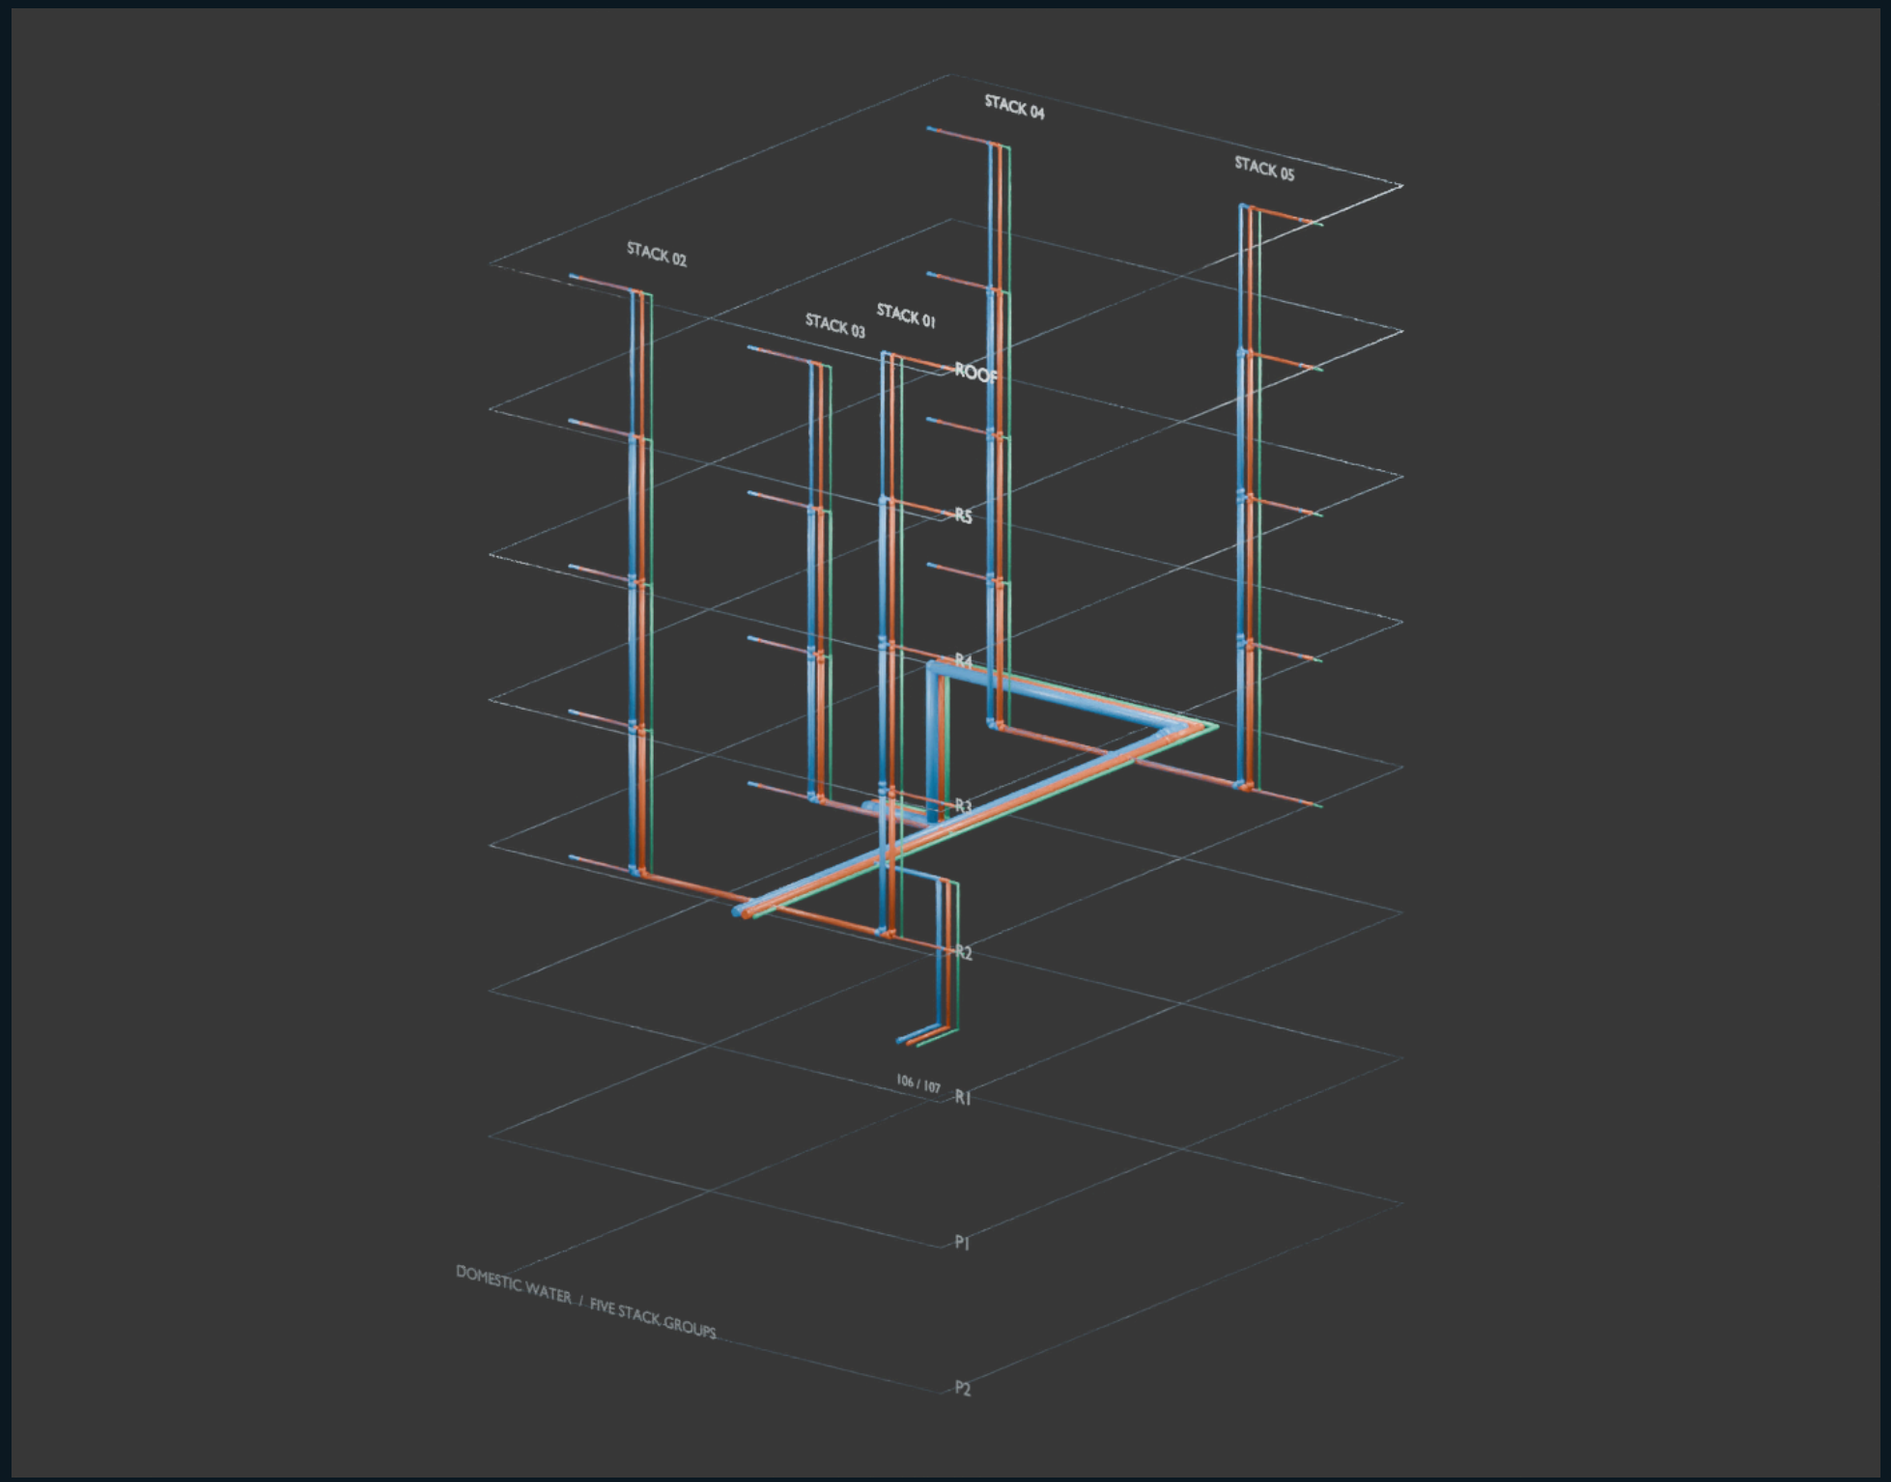

Plant connections

P3.02 / detail 1: two boilers, two storage tanks, four expansion vessels and three installed pumps. WAC2 is a loose spare. Equipment envelopes are representative; relief piping, flues, detailed controls and balancing bypasses are incomplete.

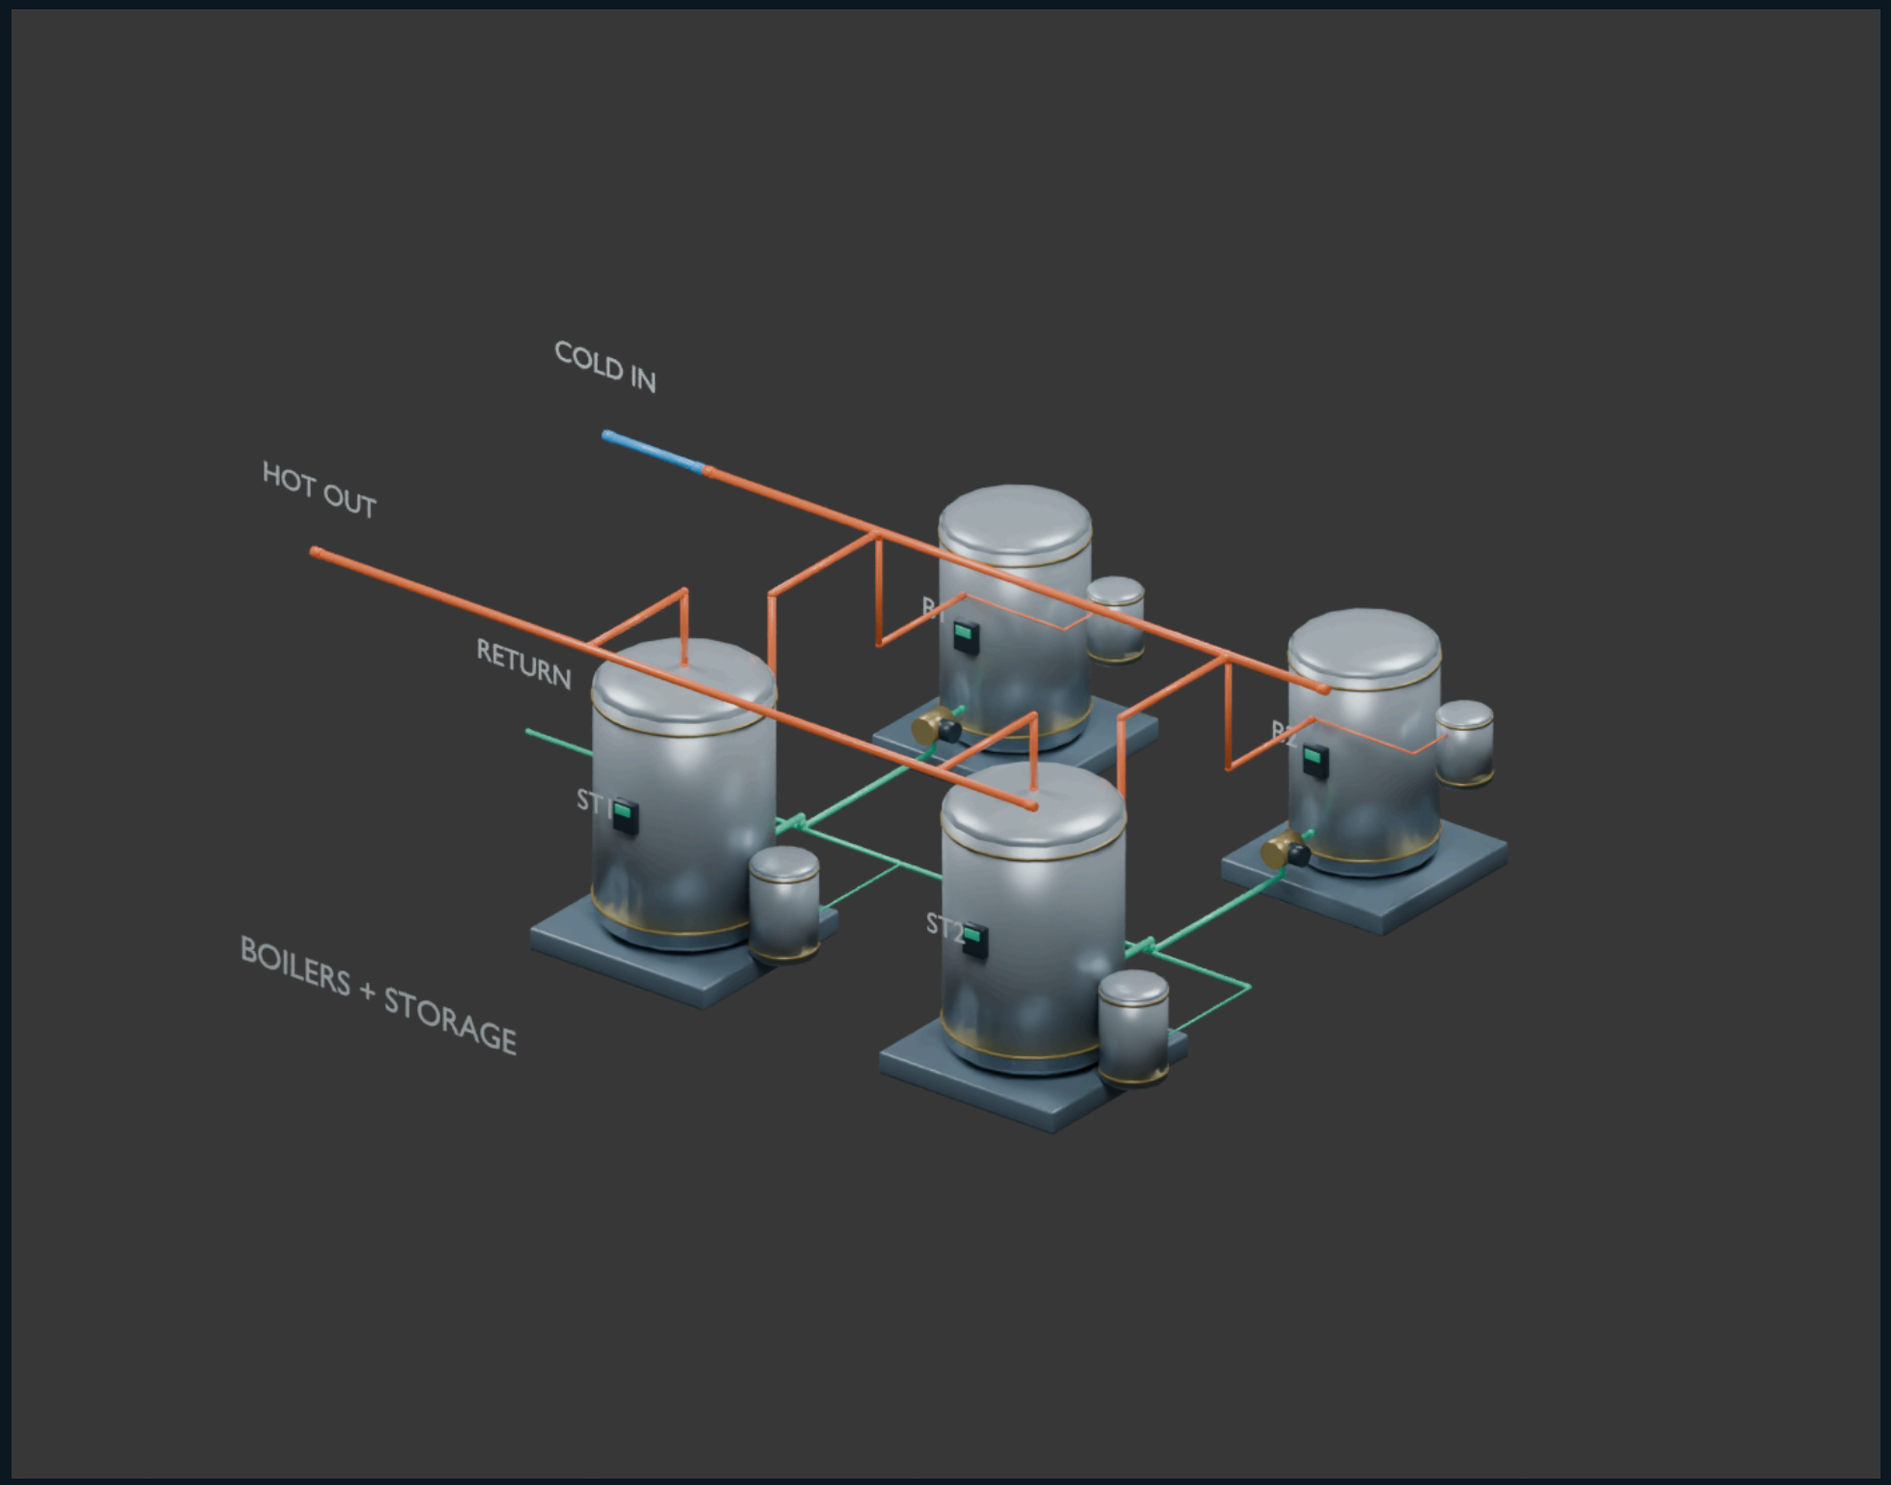

What is checked, and what is still needed

This first model establishes actual pipe geometry and a reviewable drawing basis. It is not yet a dimensionally coordinated owner presentation.

CHECKED

- Unique element IDs and provenance on all 319 elements.
- Document-based counts: 5 stack groups, 23 explicit branch groups, 14 Unit A fixtures.
- Every modeled distribution branch reaches its own system inlet.
- Separate cold / hot / return geometry; editable Blender and GLB exports.

NEEDED BEFORE ACCURATE PLACEMENT

- A dimensioned architectural plan or a verified reference dimension for Unit 107.
- Floor-to-floor elevations, ceiling heights and pipe elevations.
- Riser / shaft locations, pipe offsets and equipment dimensions.
- Resolution of the 04 stack R1 connection and Unit A dishwasher connection.
- Field verification if the objective is existing installed plumbing.

CURRENT SCOPE

Domestic water supply and return only. Sanitary, vent and gas systems are not modeled.
No construction lengths or quantities can be extracted reliably from assumed coordinates.
The complete assumptions and omissions are recorded in the specification and README.