EXHIBIT - A

PROJECT DESCRIPTION

PROJECT INCLUDES COMPLETE REPIPE OF SANITARY SOIL, WASTE PIPING IN BUILDING B, UNDER UNITS B101, B102, B103 AND B104. BUILDING B IS SLAB-ON-GRADE AND REQUIRES SELECTIVE SLAB CUTTING AND EXCAVATION TO REMOVE AND REPLACE EXISTING SANITARY PIPING AND RECONNECT TO THE EXISTING SIDE SEWER SYSTEM. WORK SHALL INCLUDE ALL PIPING SERVING UNITS B-101 THRU B-104 FROM FIXTURE TO CONNECTION AT EXISTING MAIN, INCLUDING VERTICAL STACKS WITHIN WALLS AND ALL UNDER-SLAB PIPING. SIDE SEWER PIPING OUTSIDE THE BUILDING FOOTPRINT HAS BEEN DETERMINED TO BE SERVICEABLE AND WILL REMAIN. NO CHANGE TO EXISTING FLOOR PLANS, FIXTURE UNITS, OR DEMAND ON EXISTING BUILDING UTILITY SERVICES. SOIL, WASTE & VENT PIPING TO BE RUN IN SAME LOCATION AS ORIGINAL, REPLACED LIKE FOR LIKE.

SCOPE, MATERIALS AND INSTALLATION:

ALL WORK SHALL COMPLY WITH THE CONTRACT DOCUMENTS INCLUDING DRAWINGS, SCOPE OF REPAIR (SOR), AND PROJECT SPECIFICATIONS; WHERE CONFLICTS EXIST, THE MORE STRINGENT REQUIREMENT SHALL GOVERN AS DETERMINED BY THE ENGINEER OF RECORD. WORK INCLUDES REMOVAL AND REPLACEMENT OF ALL SANITARY WASTE AND VENT PIPING SERVING BUILDING B (UNITS B-101 THRU B-104) WITH AN EXCEPTION A PREVIOUS RE-PIPE CITY OF BELLEVUE PERMIT RECORD #25 129840 UA. FROM FIXTURE CONNECTION TO EXISTING SIDE SEWER CONNECTION OUTSIDE THE BUILDING FOOTPRINT, INCLUDING ALL UNDER-SLAB PIPING, VERTICAL STACKS, BRANCH LINES, AND ASSOCIATED FITTINGS AND APPURTENANCES. ALL NEW SANITARY PIPING SHALL BE SCHEDULE 40 ABS (SOLID WALL) ONLY; PVC AND OTHER MATERIALS ARE NOT PERMITTED. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS, INCLUDING INVERT ELEVATIONS AND CONNECTION POINTS, PRIOR TO INSTALLATION AND SHALL NOT PROCEED WHERE DISCREPANCIES EXIST WITHOUT ENGINEER DIRECTION. CONTRACTOR SHALL MAINTAIN CONTINUOUS SANITARY SERVICE TO OCCUPIED UNITS AND SHALL PROVIDE TEMPORARY BYPASS SYSTEMS, PHASING, AND SEQUENCING AS REQUIRED. PIPE LINING IS NOT PERMITTED UNDER THE BUILDING FOOTPRINT; UNDER-SLAB PIPING SHALL BE FULLY REMOVED AND REPLACED. ALL WORK SHALL BE INSTALLED PER UPC (WA STATE), CITY OF BELLEVUE AMENDMENTS, AND MANUFACTURER REQUIREMENTS. CONTRACTOR SHALL PROVIDE COMPLETE RESTORATION OF ALL DISTURBED AREAS INCLUDING SLABS, FLOORING, WALLS, CEILINGS, AND FINISHES TO MATCH EXISTING CONDITIONS. TEST AND INSPECT ALL SYSTEMS PRIOR TO CONCEALMENT AND PROVIDE AS-BUILT DOCUMENTATION UPON COMPLETION.

DRAIN, WASTE & VENT (DWV) PIPING:

SCOPE OF WORK: CONTRACTOR TO REPLACE/REPIPE 100% OF EXISTING WASTE PIPE WITH NEW WASTE PIPE IN SAME LOCATION. NEW PIPE TO BE IN CONFORMANCE WITH THE MATERIAL SPECIFICATION INDICATED ON THIS SHEET. SEE SECTION "15050: WASTE WATER SYSTEMS" FOR ADDITIONAL INFORMATION. REPIPE TO BE PERFORMED "LIKE FOR LIKE". NO CHANGE TO EXISTING ROUTING, SLOPE, TERMINATION LOCATION, ETC. SHALL BE PERMITTED WITHOUT THE PRIOR WRITTEN PERMISSION OF THE ENGINEER OF RECORD. CONTRACTOR TO FIELD VERIFY EXISTING INSTALLATION, INCLUDING SLOPE, PRIOR TO DEMOLITION AND NOTIFY ENGINEER OF ANY CODE DISCREPANCIES. PIPING SUPPORTS TO BE IN CONFORMANCE WITH MANUFACTURER'S RECOMMENDATIONS AND CURRENT LOCAL CODE. CONTRACTOR TO FIELD VERIFY EXISTING CONDITIONS PRIOR TO CONSTRUCTION.

PLUMBING MATERIALS NOTE:

PROVIDE NEW PLUMBING MATERIALS, FITTINGS, VALVES, FIXTURES, AND APPURTENANCES SERVING BUILDING B (UNITS B-101 THRU B-104) IN ACCORDANCE WITH UPC (WA STATE), CITY OF BELLEVUE AMENDMENTS, AND MANUFACTURER REQUIREMENTS. PROVIDE NEW SANITARY WASTE AND VENT PIPING AS SCHEDULE 40 ABS (SOLID WALL) THROUGHOUT, INCLUDING ALL ABOVE-GRADE AND UNDER-SLAB APPLICATIONS. PVC PIPING IS NOT PERMITTED. INSTALL PER UPC (WA STATE), CITY OF BELLEVUE AMENDMENTS, AND MANUFACTURER REQUIREMENTS. PROVIDE SOLVENT-WELDED JOINTS AND APPROVED TRANSITION COUPLINGS AT CONNECTIONS TO EXISTING PIPING. SUPPORT, HANG, AND PROTECT PIPING IN ACCORDANCE WITH CODE. FIRESTOP ALL RATED PENETRATIONS. TEST AND INSPECT ALL SYSTEMS PRIOR TO CONCEALMENT. NO MATERIAL SUBSTITUTIONS SHALL BE PERMITTED WITHOUT WRITTEN APPROVAL FROM THE ENGINEER OF RECORD, OWNER, AND AHJ APPROVAL

FINISH RESTORATION NOTE:

CONTRACTOR SHALL REPAIR AND RESTORE ALL ARCHITECTURAL FINISHES DAMAGED OR REMOVED AS A RESULT OF PLUMBING WORK. THIS INCLUDES WALLS, CEILINGS, FLOORS, TILE, PAINT, CABINETS, AND TRIM. FINISHED SURFACES SHALL BE RESTORED TO MATCH EXISTING CONDITIONS. COORDINATE REPAIR METHODS AND MATERIALS WITH OWNER OR AS REQUIRED. ALL FINISH REPAIR WORK SHALL COMPLY WITH APPLICABLE SECTIONS OF THE INTERNATIONAL BUILDING CODE (IBC) AND CITY OF BELLEVUE AMENDMENTS.

FIXTURE RESPONSIBILITY NOTE:

PLUMBING FIXTURES AND EQUIPMENT SHOWN ON THESE PLANS AND INCLUDED IN THE FIXTURE SCHEDULE ARE BASIS-OF-DESIGN AND ARE IDENTIFIED BY MANUFACTURER AND MODEL NUMBER FOR REFERENCE. ALTERNATE FIXTURES OF EQUAL QUALITY, PERFORMANCE, CAPACITY, AND CODE COMPLIANCE MAY BE SUBMITTED FOR APPROVAL AND INSTALLED, SUBJECT TO THE FOLLOWING: PROPOSED SUBSTITUTIONS SHALL COMPLY WITH THE CURRENTLY ADOPTED CITY OF BELLEVUE CODES, INCLUDING BUT NOT LIMITED TO THE UNIFORM PLUMBING CODE (UPC) AND APPLICABLE ASME/ASSE STANDARDS. SUBSTITUTED FIXTURES SHALL BE UPC-LISTED, MEET REQUIRED FLOW RATES, AND MAINTAIN EQUIVALENT OR BETTER PERFORMANCE CHARACTERISTICS. NO SUBSTITUTION SHALL REDUCE HEALTH, SAFETY, ACCESSIBILITY, DURABILITY, OR WATER EFFICIENCY. EXISTING FIXTURES SHALL BE REMOVED, PROTECTED, AND REINSTALLED BY CONTRACTOR UNLESS OTHERWISE NOTED; REPLACE DAMAGED OR NON-COMPLIANT FIXTURES. INCLUDING FLOORING, WALLS AND FINISHES AS DIRECTED BY OWNER/ENGINEER.

INSURANCE

CONTRACTOR SHALL MAINTAIN CGL ($2M/$4M), AUTO ($1M), WORKERS'COMP (STATUTORY), AND UMBRELLA ($3M) COVERAGE; OWNER, PROPERTY MANAGER, AND KEAD SHALL BE NAMED ADDITIONAL INSUREDS ON A PRIMARY AND NON-CONTRIBUTORY BASIS; PROVIDE COI AND ENDORSEMENTS PRIOR TO WORK AND WAIVER OF SUBROGATION WHERE PERMITTED.

EQUIPMENT SCHEDULE:

TYPICAL UNIT:

WH-1	MANUFACTURER: RHEEM, MODEL: XE40M06ST45U1, TYPE: ELECTRIC STORAGE CAPACITY: 40 GALLONS
WB-1	MANUFACTURER: LG ELECTRONICS, MODEL: WM4000HWA (OR APPROVED EQUAL) TYPE: FRONT-LOADING AUTOMATIC WASHING MACHINE, CAPACITY: 4.5 CU. FT. WATER SUPPLY: HOT & COLD, 3/4" HOSE CONNECTIONS, DRAIN: STANDPIPE OR LAUNDRY SINK (PER UPC), ELECTRICAL: 120V / 1-PHASE, 60 HZ
LAV-1	MANUFACTURER: KOHLER (OR APPROVED EQUAL), MODEL: CAXTON K-2210 (TYPICAL UNDERMOUNT), MATERIAL: VITREOUS CHINA INTEGRAL OVERFLOW, DRAIN SIZE: 1-1/4", STANDARD: ASME A112.19.2 / CSA B45.1, BALANCING VALVE: KOHLER, MODEL: K-10215-4, KEY CHARACTERISTICS: 1.2 GPM, ASME A112.18.1
WC-1	MANUFACTURER: KOHLER HIGHLINE, MODEL: VEIL K-6299-0, KEY CHARACTERISTICS: WALL-HUNG 1.28 GPF, UPC LISTED
SH-1	MANUFACTURER: KOHLER, VALVE: RITE-TEMP PRESSURE-BALANCING VALVE (K-304-KS) TRIM: KOHLER SHOWER TRIM (FINISH PER INTERIOR SELECTION), SHOWERHEAD: ≤ 2.0 GPM ASSE 1016 / ASME A112.18.1
BT-1	MANUFACTURER: KOHLER VILLAGER, MODEL: K-715-0, KEY CHARACTERISTICS: CAST IRON, 60 IN
KS-1	MANUFACTURER: GROHE, MODEL: 31615SD0, KEY CHARACTERISTICS: STAINLESS STEEL UNDERMOUNT, ASME A112.19.3
FD-1	MANUFACTURER: ZURN (OR APPROVED EQUAL), MODEL: ZN415-2 (TYPICAL) TYPE: STANDARD RESIDENTIAL FLOOR DRAIN, OUTLET SIZE: 2-INCH, NO-HUB OR HUB (VERIFY PIPING SYSTEM), BODY MATERIAL: CAST IRON (PVC ACCEPTABLE WHERE PERMITTED), GRATE: ROUND, NICKEL BRONZE OR CAST IRON, TRAFFIC-RATED, STANDARD: ASME A112.6.3 / CSA B79.3

LEGEND & SYMBOLS

CW	EXISTING COLD WATER
HW	EXISTING HOT WATER
S	EXISTING SOIL/WASTE
V	EXISTING VENT PIPING =
	DOMESTIC COLD WATER (DCW)
	DOMESTIC HOT WATER (DHW)
	HOT WATER RETURN (HWR)
TW	TEMPERED WATER (TW)
	HOSE BIBB WITH VACUUM BREAKER (HB W/ VB)
	POINT OF CONNECTION (P.O.C.)
	PIPE DOWN
	PIPE "T" DOWN
	PIPE UP
	SHUT-OFF VALVE (SOV)
	SHUT-OFF VALVE IN CONCRETE YARD BOX WITH CAST IRON COVER
	SHUT-OFF VALVE(S) ABOVE CEILING WITH ACCESS PANEL
	SOIL/WASTE
	SURFACE CLEAN OUT (SCO)
	2-WAY SURFACE CLEAN OUT (TWSCO)
	UNION
	VENT PIPING (V)
	VENT THRU ROOF (VTR) LOCATE 10' FROM FRESH AIR SOURCE
	WALL CLEAN OUT (WCO)
	ELBOW, TURNING UP OR TOWARD
	ELBOW, TURNING DOWN OR AWAY
	TEE, OUTLET UP OR TOWARD
	TEE, OUTLET DOWN OR AWAY
	TEE, OUTLET DOWN OR AWAY(IN RISER)
	ELBOW, 90°
	PIPING CONNECTION
	PIPING INTERSECTION
	FLANGE
	UNION
	CAP, SCREWED OR SOLDER JOINT
	BLIND FLANGE
SLOPE	DIRECTION OF SLOPE
	PUMP(WITH FLOW DIRECTION INDICATED)
	BALL VALVE(NORMALLY OPEN)
	CALIBRATED BALANCING VALVE
	PRESSURE/TEMPERATURE TEST PORT
	WYE STRAINER WITH HOSE END DRAIN VAL
	WYE STRAINER
	AUTOMATIC CONTROL VALVE 2-WAY
	AUTOMATIC CONTROL VALVE 3-WAY
	CHECK VALVE
	TRIPLE DUTY VALVE
	RELIEF VALVE
	GATE VALVE
	FLOOR CLEAN OUT
FCO	
	GROUND CLEAN OUT
GCO	
P-X	FIXTURE & RISER TAG NUMBER (WASTE)
	FLOOR DRAIN
	FLOOR SINK
	FLOOR SINK
	ROOF DRAIN
	ROOF DRAIN ABOVE
	HOSE BIBB
	FUNNEL
	FLOW ARROW
	CONTROL ACTUATOR
	SOLENOID ACTUATOR
	ACTUATOR
	OS & Y ACTUATOR
	ACTUATOR VALVE IN DROP OR RISER
A&C	HOT & COLD WATER RISER TAG NUMBER.
-	ALL SYMBOLS MAY NOT BE USED.

ABBREVIATIONS

ADA	AMERICAN DISABILITIES ACT
AD	AREA DRAIN
ADJ	ADJACENT, ADJUST, ADJUSTABLE, ADJUSTMENT
AFF	ABOVE FINISHED FLOOR
ALIGN	ALIGNMENT
AP	ACCESS PANEL
APPROX	APPROXIMATELY
ARCH	ARCHITECTURAL
ASME	AMERICAN SOCIETY OF MECHANICAL ENGINEERS
AVG	AVERAGE
BFF	BELOW FINISH FLOOR
BHP	BRAKE HORSEPOWER
BLDG	BUILDING
BOD	BOTTOM OF DUCT
BOP	BOTTOM OF PIPE
BPD	BACKFLOW PREVENTION DEVICE
BT	BATH TUB
BTU	BRITISH THERMAL UNIT
BTUH	BRITISH THERMAL UNITS PER HOUR
BV	BALANCING VALVE
CFM	CUBIC FEET PER MINUTE
CG	CEILING GRILLE
CI	CAST IRON
CLG	CEILING
CO	CLEANOUT
CONN	CONNECT, CONNECTED, CONNECTION
CONST	CONSTRUCTION
CONT	CONTINUOUS, CONTINUATION
COORD	COORDINATE
CORR	CORRIDOR
COTG	CLEANOUT TO GRADE
CU FT	CUBIC FEET
CU IN	CUBIC INCHES
CW	COLD WATER
DCV	DEMAND CONTROL VENTILATION
DCVA	DOUBLE CHECK VALVE ASSEMBLY
DEG	DEGREE
DET	DETAIL
DFU	DRAINAGE FIXTURE UNIT
DIA	DIAMETER
DIFF	DIFFERENTIAL, DIFFERENT, DIFFUSER
DIM	DIMENSION
DISCH	DISCHARGE
DN	DOWN
DOM	DOMESTIC
DR	DRAIN
DS	DOWNSPOUT
DWG	DRAWING
EA	EACH
EFF	EFFICIENCY
ELECT	ELECTRICAL
ELEV	ELEVATION
EMERG	EMERGENCY
ENT	ENTERING
EXIST	EXISTING
EXP	EXPANSION
F	FAHRENHEIT
FCO	FLOOR CLEANOUT
FD	FIRE DAMPER, FLOOR DRAIN
FDC	FIRE DEPARTMENT CONNECTION
FIO	FURNISHED AND INSTALLED BY OWNER
FLA	FULL LOAD AMP
FLEX	FLEXIBLE
FLR	FLOOR
FOB	FLAT ON BOTTOM
FOIC	FURNISHED BY OWNER INSTALLED BY CONTRACTOR
FOT	FLAT ON TOP
FPM	FEET PER MINUTE
FPS	FEET PER SECOND
FT	FOOT, FEET
FU	FIXTURE UNITS
G	GAS
GA	GAGE
GAL	GALLON
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GEN	GENERAL
GND	GROUND
GPH	GALLONS PER HOUR
GPM	GALLONS PER MINUTE
GW	GREASE WASTE
H	HEIGHT, HIGH
HB	HOSE BIBB
HP	HORSEPOWER
HR	HOUR
HTG	HEATING
HW	HOT WATER
HWC	HOT WATER CIRCULATING
HWR	HOT WATER HEATING RETURN
HWS	HOT WATER HEATING SUPPLY
HZ	HERTZ
IBC	INTERNATIONAL BUILDING CODE
ID	INDIRECT DRAIN
IE	INVERT ELEVATION
IMC	INTERNATIONAL MECHANICAL CODE
IN	INCH
INSUL	INSULATE, INSULATION
IW	INDIRECT WASTE
KS	KITCHEN SINK
KW	KILOWATT
KWH	KILOWATT HOUR
L	LENGTH
LAV	LAVATORY
LBS	POUNDS
LF	LINEAL FOOT
LVG	LEAVING
MAX	MAXIMUM
MBH, MBTU	THOUSAND BRITISH THERMAL UNITS PER HOUR
MCA	MINIMUM CIRCUIT AMPACITY
MCC	MOTOR CONTROL CENTER
MECH	MECHANICAL
MFR	MANUFACTURER
MIN	MINIMUM, MINUTE
MISC	MISCELLANEOUS
MTD	MOUNTED
MTG	MOUNTING
NA	NOT APPLICABLE
NC	NOISE CRITERIA
NIC	NOT IN CONTRACT
NTS	NOT TO SCALE
OD	OUTSIDE DIAMETER, OVERALL DIAMETER
OH	OVERHEAD
ORD	OVERFLOW ROOF DRAIN
P	PUMP
PD	PRESSURE DROP, PIT DRAIN
PH	PHASE
POC	POINT OF CONNECTION
PRELIM	PRELIMINARY
PRESS	PRESSURE
PRV	PRESSURE REDUCING VALVE
PSI	POUNDS PER SQUARE INCH
PSIG	POUNDS PER SQUARE INCH GAGE
RD	ROOF DRAIN
RECIRC	RECIRCULATING
RECT	RECTANGULAR
REF	REFERENCE
REG	REGULATOR
REQD	REQUIRED
RPBP	REDUCED PRESSURE BACKFLOW PREVENT
RPM	REVOLUTIONS PER MINUTE
RV	RELIEF VALVE
SAN	SANITARY
SCHED	SCHEDULE
SF	SUPPLY FAN, SQUARE FEET
SH	SHOWER
SOV	SHUT OFF VALVE
SP	STATIC PRESSURE
SPEC	SPECIFICATION
SPECD	SPECIFIED
SST	STAINLESS STEEL
SS	SOIL STACK, SANITARY SEWER
STRUCT	STRUCTURAL
TBD	TO BE DETERMINED
TEMP	TEMPERATURE, TEMPORARY
THRU	THROUGH
TOP	TOP OF PIPE
TP	TRAP PRIMER
TS	TEMPERATURE SENSOR
TW	TEMPERED WATER
TWR	TEMPERED WATER RECIRCULATE
TYP	TYPICAL
UPC	UNIFORM PLUMBING CODE
UTR	UP THRU ROOF
V	VENT
VB	VACUUM BREAKER
VEL	VELOCITY
VERT	VERTICAL
VOL	VOLUME
VS	VENT STACK
VTR	VENT TO ROOF
W	WASTE
WB	WASHER BOX
WC	WATER CLOSET
WH	WATER HEATER
WCO	WALL CLEAN OUT
WG	WATER GAGE
WHA	WATER HAMMER ARRESTOR
W/	WITH
W/O	WITHOUT
WS	WASTE STACK
WT	WEIGHT
WSFU	WATER SUPPLY FIXTURE UNIT
-	ALL ABBREVIATIONS MAY NOT BE USED.

PLUMBING GENERAL NOTES:

ALL WORK TO BE IN CONFORMANCE WITH THE BELLEVUE MUNICIPAL CODE CHAPTER 23.60, THE 2021 UNIFORM PLUMBING CODE AND WASHINGTON STATE PLUMBING CODE AMENDMENTS.

ANY PENETRATIONS OF FIRE RATED ASSEMBLIES SHALL BE IN ACCORDANCE WITH THE UNIFORM BUILDING CODE, FIRE CODE AND PLUMBING CODE (AS APPLICABLE). IN NO CASE SHALL THE INTEGRITY OF SAID ASSEMBLIES BE COMPROMISED AS PART OF THIS WORK. CONTRACTOR TO FIELD VERIFY EXISTING CONDITIONS PRIOR TO CONSTRUCTION AND NOTIFY ENGINEER OF ANY DISCREPANCIES.

BUILDING DRAIN AND VENT PIPING MATERIALS SHALL COMPLY WITH THE BELLEVUE MUNICIPAL CODE CHAPTER 23.60, THE 2021 UNIFORM PLUMBING CODE AND WASHINGTON STATE PLUMBING CODE AMENDMENTS.

ALL SANITARY SYSTEM MATERIALS SHALL BE LISTED BY AN APPROVED LISTING AGENCY:

GENERAL

PROVIDE ALL LABOR, MATERIALS, EQUIPMENT, AND SERVICES NECESSARY FOR THE COMPLETE INSTALLATION OF THE PLUMBING WORK SHOWN AND SPECIFIED.

ALL PLUMBING WORK SHALL COMPLY WITH THE CITY OF BELLEVUE PLUMBING CODE (UPC AS AMENDED), WASHINGTON STATE AMENDMENTS, AND ALL APPLICABLE LOCAL REGULATIONS.

WORK SHALL BE COORDINATED WITH ARCHITECTURAL, STRUCTURAL, AND OTHER TRADES TO AVOID CONFLICTS AND MAINTAIN REQUIRED CLEARANCES.

CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO CONSTRUCTION. NO ALLOWANCE WILL BE MADE FOR LACK OF FAMILIARITY WITH SITE CONDITIONS.

MAINTAINING SERVICE DURING CONSTRUCTION

CONTRACTOR SHALL MAINTAIN CONTINUOUS SANITARY SERVICE TO OCCUPIED UNITS DURING CONSTRUCTION. PROVIDE SEQUENCING, TEMPORARY CONNECTIONS, AND COORDINATION TO MINIMIZE DISRUPTION. ANY REQUIRED SHUTDOWNS SHALL BE LIMITED IN DURATION AND COORDINATED WITH OWNER WITH MINIMUM 48 HOURS NOTICE. NO INTERRUPTION OF SERVICE SHALL OCCUR WITHOUT PRIOR APPROVAL.

TEMPORARY BYPASS SYSTEM

CONTRACTOR SHALL DESIGN, INSTALL, MAINTAIN, AND REMOVE TEMPORARY BYPASS PIPING AS REQUIRED TO MAINTAIN SERVICE DURING DEMOLITION AND INSTALLATION OF NEW WORK. BYPASS SYSTEM SHALL BE SIZED TO HANDLE ANTICIPATED FLOWS AND INSTALLED TO PREVENT LEAKS, BACKUPS, OR SANITARY HAZARDS. SECURE AND SUPPORT ALL TEMPORARY PIPING. REMOVE TEMPORARY SYSTEM UPON COMPLETION AND RESTORE ALL AFFECTED AREAS.

DEMOLITION

REMOVE EXISTING SANITARY SEWER PIPING, FITTINGS, AND APPURTENANCES AS SHOWN ON THE DEMOLITION DRAWINGS.

MAINTAIN CONTINUOUS SANITARY SERVICE TO OCCUPIED AREAS. PROVIDE TEMPORARY BYPASS PIPING WHERE REQUIRED.

CAP ALL ABANDONED SEWER PIPING GAS-TIGHT IMMEDIATELY AFTER DEMOLITION.

PROTECT ALL EXISTING PIPING, FIXTURES, FINISHES, AND BUILDING ELEMENTS DESIGNATED TO REMAIN.

SANITARY SEWER PIPING

NEW SANITARY SEWER PIPING SHALL BE SCHEDULE 40 ABS (SOLID WALL) ONLY, CONFORMING TO APPLICABLE ASTM STANDARDS AND APPROVED BY THE BELLEVUE PLUMBING CODE.

INSTALL PIPING WITH MINIMUM SLOPES AS REQUIRED BY CODE (1/4 INCH PER FOOT FOR PIPING 2 1/2 INCHES AND SMALLER UNLESS OTHERWISE PERMITTED).

ALL PIPING SHALL BE INSTALLED PLUMB AND TRUE WITH CHANGES IN DIRECTION MADE USING APPROVED FITTINGS.

PROVIDE APPROVED TRANSITION COUPLINGS WHEN CONNECTING TO EXISTING PIPING OF DIFFERENT MATERIALS. ALL WORK SHALL COMPLY WITH PROJECT PLUMBING SPECIFICATIONS AND ABS PIPING REQUIREMENTS.

CLEANOUTS & VENTING

PROVIDE CLEANOUTS AT THE BASE OF STACKS, AT CHANGES IN DIRECTION EXCEEDING 45 DEGREES, AND AT INTERVALS REQUIRED BY 2021 UPC CODE.

DO NOT LOCATE CLEANOUTS IN CONCEALED OR INACCESSIBLE LOCATIONS AFTER CONSTRUCTION AND BE FITTED WITH APPROVED PLUGS.

VENT PIPING SHALL COMPLY WITH CODE REQUIREMENTS. EXISTING VENTS MAY BE REUSED ONLY WHERE VERIFIED TO BE SERVICEABLE AND CODE-COMPLIANT.

SUPPORTS & SEISMIC RESTRAINT

SUPPORT ALL PIPING IN ACCORDANCE WITH CODE AND MANUFACTURER'S RECOMMENDATIONS.

PROVIDE SEISMIC BRACING FOR PIPING AS REQUIRED BY CODE.

ISOLATE PIPING FROM BUILDING STRUCTURE TO MINIMIZE NOISE AND VIBRATION TRANSMISSION.

BACKFILL REQUIREMENTS SEE DETAIL 1/P5.0.

PENETRATIONS & FIRESTOPPING

SEAL ALL WALL, FLOOR, AND SLAB PENETRATIONS WITH APPROVED FIRE-RESISTIVE AND WATERPROOFING SYSTEMS. MAINTAIN THE FIRE-RESISTANCE RATING OF ALL ASSEMBLIES PENETRATED BY PLUMBING PIPING.

TESTING & INSPECTION

TEST ALL NEW SANITARY SEWER PIPING PRIOR TO CONCEALMENT IN ACCORDANCE WITH THE BELLEVUE PLUMBING CODE.

NOTIFY THE AUTHORITY HAVING JURISDICTION FOR REQUIRED INSPECTIONS. DO NOT CONCEAL WORK UNTIL APPROVED.

RESTORATION

RESTORE ALL SURFACES, FLOORING, WALLS, AND CEILINGS DISTURBED BY PLUMBING WORK TO MATCH EXISTING CONDITIONS UNLESS NOTED OTHERWISE.

REMOVE ALL DEBRIS AND ABANDONED MATERIALS FROM THE SITE UPON COMPLETION.

SHEET INDEX

P0.1	ABBREVIATIONS, PLUMBING GENERAL NOTES, SYMBOLS & EQUIPMENT SCHEDULE
P0.2	PLUMBING SPECIFICATIONS, SCHEDULES, CALCULATIONS & DETAILS
P0.3	PLUMBING SCHEDULES
P1.0	PLUMBING SITE PLAN
P1.01	BUILDING B – FIRST FLOOR – WASTE PLUMBING DEMOLITION PLAN
P1.02	BUILDING B – FIRST FLOOR – WASTE PLUMBING FOUNDATION PLAN
P2.1	BUILDING B – FIRST FLOOR – WASTE PLUMBING PLAN
P2.2	BUILDING B – ROOF PLUMBING PLAN
P3.1	BUILDING B – FIRST FLOOR – UNIT B-101 & B-102 WASTE ENLARGED PLAN
P3.2	BUILDING B – FIRST FLOOR – UNIT B-103 & B-104 WASTE ENLARGED PLAN
P4.1	BUILDING B – FIRST FLOOR – WASTE & VENT RISER DIAGRAMS
P4.2	BUILDING B – FIRST FLOOR – WASTE & VENT RISER DIAGRAMS
P5.0	BUILDING B – FIRST FLOOR – PLUMBING DETAILS
P5.1	BUILDING B – FIRST FLOOR – PLUMBING DETAILS

PHSKC STAMP

"KE | AD"
KE|AD
BUILDING PUBLIC TRUSTS
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

FRONT LL SCHEETZ — STATE OF WASHINGTON — REGISTERED PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT: MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 6390000000

SHEET CONTENTS:
BUILDING 'B'
FIRST FLOOR
PLUMBING PLAN
COVER SHEET

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P0.1

SCALE: 1"=1'-0"

© 2025 KE | AD, LLC

PLUMBING SPECIFICATIONS

15010 GENERAL PROVISIONS:

1. SCOPE: THIS SECTION ESTABLISHES AND DESCRIBES REQUIRED STANDARDS OF QUALITY AND PERFORMANCE FOR PRODUCTS, SYSTEMS AND METHODS ENCOMPASSED BY DIVISION 15000. THIS SECTION ALSO SUMMARIZES THE VARIOUS SYSTEMS TO BE INSTALLED UNDER DIVISION 15000.

15010.1 SPECIAL CONDITIONS:

1. THE SPECIFICATIONS AND ACCOMPANYING DRAWINGS ARE INTENDED TO COVER SYSTEMS WHICH WILL FIT THE AVAILABLE SPACE, WHICH WILL NOT INTERFERE WITH THE GENERAL STRUCTURAL DESIGN. CAREFULLY EXAMINE THE DRAWINGS FOR ALL BRANCHES OF WORK AND BE RESPONSIBLE FOR THE PROPER FITTING OF MATERIAL AND APPARATUS INTO THE BUILDING. NOTIFY ENGINEER/ARCHITECT OF ANY DISCREPANCIES, OMISSIONS OR QUESTIONS IMMEDIATELY.

2. CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS AND NOTIFY ARCHITECT/ ENGINEER OF ANY DISCREPANCIES PRIOR TO BIDDING. ANY EXTRA EXPENSES AS A RESULT OF FAILURE TO ADEQUATELY REVIEW THE EXISTING CONDITIONS WILL BE BORNE BY THE CONTRACTOR.

3. ALL EQUIPMENT SHALL BE UL OR ETL LISTED.

15010.2 REGULATIONS, CODES AND PERMITS:

GIVE ALL NECESSARY NOTICES, OBTAIN ALL PERMITS, AND PAY ALL TAX FEES AND OTHER COSTS IN CONNECTION WITH WORK; FILE ALL NECESSARY PLANS, PREPARE ALL DOCUMENTS AND OBTAIN ALL NECESSARY APPROVALS OF ALL REGULATING AUTHORITIES HAVING JURISDICTION; OBTAIN ALL REQUIRED CERTIFICATES OF INSPECTION FOR WORK AND DELIVER SAME TO ARCHITECT/OWNER BEFORE REQUEST FOR ACCEPTANCE AND FINAL PAYMENT FOR WORK.

15010.3 COORDINATION OF WORK:

DRAWINGS ARE DIAGRAMMATIC FOR PIPING, CONDUITS AND DUCTWORK THAT IS NOT INDICATED IN DETAIL. SIZES OF PIPING, CONDUITS, AND DUCTWORK AND THEIR LOCATIONS ARE INDICATED AS INSIDE CLEAR DIMENSIONS, BUT IS NOT INTENDED TO SHOW EVERY OFFSET OF FITTING OR EVERY STRUCTURAL DIFFICULTY THAT MAY BE ENCOUNTERED DURING INSTALLATION OF THE WORK. THE ALIGNMENT OF PIPING, CONDUIT, OR DUCTWORK SHALL BE VARIED FROM THAT INDICATED ON THE DRAWINGS WITHOUT EXTRA EXPENSE TO THE OWNER WHERE NECESSARY TO AVOID STRUCTURAL OR MECHANICAL DIFFICULTIES, OR TO AVOID THE WORK OF ANY OTHER TRADES.

15010.4 WORKMANSHIP:

PERFORM LABOR IN A THOROUGH AND COMPLETE WORKMANLIKE MANNER AND WITH ALL REASONABLE RAPIDITY TO THE SATISFACTION OF THE ARCHITECT/OWNER.

15010.5 EXCAVATION AND BACKFILLING:

PERFORM ALL NECESSARY EXCAVATION, SHORING AND BACKFILLING REQUIRED FOR THE PROPER LAYING OF ALL PIPES AND CONDUITS INSIDE THE BUILDING AND PREMISES, AND OUTSIDE AS MAY BE NECESSARY.

15010.6 ALTERNATES:

1. ALTERNATE FIXTURES AND EQUIPMENT WILL BE ACCEPTED WITH PRIOR WRITTEN APPROVAL FROM THE ENGINEER.

2. ALTERNATE MATERIALS WILL ONLY BE ACCEPTABLE WITH PRIOR WRITTEN APPROVAL OF THE ENGINEER.

3. ADDITIONAL ENGINEERING REQUIREMENTS DUE TO ALTERNATE MATERIALS, FIXTURES OR EQUIPMENT WILL BE PERFORMED AT ENGINEERS STANDARD HOURLY RATES WITH A MINIMUM OF $250.00 PAYABLE BY CONTRACTOR PRIOR TO PERFORMANCE OF WORK.

15010.7 CUTTING AND PATCHING:

1. CUT COMPLETED CONSTRUCTION WORK ONLY IF SLEEVES, OPENING, CHASES, ETC., WERE INADVERTENTLY OMITTED AND ONLY WITH THE SPECIFIED APPROVAL OF THE ARCHITECT. IN NO CASE SHALL REINFORCING STEEL BE CUT WITHOUT THE SPECIFIC PERMISSION OF THE ARCHITECT.

2. WHERE CUTTING AND PATCHING OCCURS IN STREETS, SIDEWALKS, ALLEYS, AND THE LIKE, COOPERATE FULLY WITH THE OWNER AND MUNICIPAL AUTHORITIES TO MAINTAIN SAFE AND REQUIRED TRAFFIC FLOWS. NO EXTRAS WILL BE ALLOWED FOR TRAFFIC PATROLMEN OR OVERTIME WORK IF SUCH IS REQUIRED BY CITY, COUNTY, OR STATE OFFICIALS. PATCHING SHALL MEET ALL REQUIREMENTS OF MUNICIPAL OR OTHER GOVERNMENT BODIES.

15010.8 INSTALLATION INSTRUCTIONS:

1. ALL EQUIPMENT SHALL BE UL LISTED & INSTALLED ACCORDING TO MANUFACTURER'S INSTRUCTIONS AND RECOMMENDATIONS. SHOULD ANY VARIANCE BETWEEN PLANS AND SPECIFICATIONS OCCUR WITH THESE INSTRUCTIONS, THE ARCHITECT OR ENGINEER SHOULD BE CONTACTED IMMEDIATELY SO THAT ANY VARIATIONS IN INSTALLATION CAN BE KNOWN BY ALL PARTIES CONCERNED.

2. INSTRUCT OWNER IN THE PROPER OPERATION AND MAINTENANCE OF EQUIPMENT. PROVIDE OWNER WITH BOUND OPERATING AND MAINTENANCE MANUALS, INCLUDE PARTS LIST, MAINTENANCE SCHEDULE, AND NAME, ADDRESS, AND PHONE NUMBER OF LOCAL PRODUCT REPRESENTATIVE.

15010.9 WARRANTY:

EACH COMPLETED SYSTEM SHALL BE WARRANTED FOR A PERIOD OF TWO(2) YEAR FROM THE DATE OF ACCEPTANCE OF THE WORK BY THE OWNER. THE CONTRACTOR SHALL WARRANTY EACH SYSTEM IN WRITING TO BE FREE OF DEFECTS OF MATERIAL AND WORKMANSHIP AND TO PERFORM SATISFACTORILY UNDER ALL CONDITIONS OF LOAD OR SERVICE. THE WARRANTIES SHALL PROVIDE THAT ANY ADDITIONAL CONTROLS, PROTECTIVE DEVICES, OR EQUIPMENT WILL BE PROVIDED AS NECESSARY TO MAKE THE SYSTEMS OR EQUIPMENT OPERATE SATISFACTORILY, THAT ANY FAULTY MATERIALS OR WORKMANSHIP WILL BE REPLACED OR REPAIRED, AND THAT ON FAILURE OF THE WARRANTOR TO DO THE ABOVE AFTER WRITTEN NOTICE FROM THE OWNER, THE OWNER MAY HAVE THE WORK DONE AT THE COST OF THE WARRANTOR.

15020 BASIC MATERIALS AND METHODS:

SCOPE: THIS SECTION SETS FORTH PRODUCTS AND METHODS OF INSTALLATION FOR PLUMBING, HEATING, VENTILATION AND AIR CONDITIONING.

15020.1 SLEEVES:

WHERE PIPING, DUCTWORK, STACKS, ETC., PASSES THROUGH SUCH BUILDING ELEMENTS AS WALLS, FLOORS, ROOFS, FOOTINGS, ETC., PROVIDE SLEEVES UNLESS INDICATED OTHERWISE.

15020.2 HANGERS AND SUPPORTS:

SUPPORT HANGERS OF HORIZONTAL PIPE WITH VERTICALLY ADJUSTABLE HANGERS ON MALLEABLE SWIVEL RING OR WROUGHT STEEL CLEVIS TYPE HANGER SUSPENDED ON THREADED STEEL ROD HANGERS, EQUAL TO FEE AND MASON FIG. 199 AND FIG. 239 RESPECTIVELY WITH CLEVIS TYPE UTILIZED FOR LARGER PIPING.

15050 WASTE WATER SYSTEMS:

SCOPE: DETERMINE IN ADVANCE OF CONSTRUCTION LOCATION OF ANY AND ALL EXISTING WASTE PIPING ON SITE.. FURNISH AND INSTALL A COMPLETE SANITARY WASTE SYSTEM. CONTRACTOR TO FIELD ROUTE ALL NEW PIPING TO TIE TO EXISTING BUILDING SEWER.

15050.1 SOIL AND WASTE INSTALLATION:

1. BURY ALL EXTERIOR SOIL LINES A MINIMUM OF 18" BELOW FINISHED GRADE.

2. SLOPE HORIZONTAL SOIL AND WASTE PIPES UNDER BUILDING 1/4" PER FOOT. SLOPE SHALL BE UNIFORM AND FREE OF DIPS, TRAPS, ETC.

3. ALL VENTS TO BE LOCATED A MINIMUM OF 10' FROM ANY OUTSIDE AIR INTAKE.

4. NOTIFY ENGINEER IMMEDIATELY IF UPPER MANHOLE RIM IS ABOVE FINISHED FLOOR. CONTRACTOR TO FIELD VERIFY.

5. UNDERGROUND NONMETALLIC SANITARY DRAINAGE PIPING SHALL BE INSTALLED WITH INSULATED COPPER TRACER WIRE. PER LOCAL CODE.

15050.2 PIPING:

1. ALL PLUMBING MATERIALS, FITTINGS, VALVES, FIXTURES, AND APPURTENANCES SERVING BUILDING B, UNDER UNITS B-101, B-102, B-103, AND B-104 AT MEYDENBAUER CONDOMINIUMS SHALL BE NEW AND INSTALLED IN ACCORDANCE WITH THE WASHINGTON STATE PLUMBING CODE (UPC AS ADOPTED), CITY OF BELLEVUE AMENDMENTS, APPLICABLE STANDARDS, AND MANUFACTURER'S INSTALLATION INSTRUCTIONS; DOMESTIC WATER PIPING SHALL BE TYPE L COPPER, PEX-A, OR APPROVED EQUAL, UNDERGROUND DOMESTIC WATER PIPING (IF APPLICABLE) SHALL BE TYPE K COPPER OR APPROVED PLASTIC PIPING, SANITARY SOIL, WASTE, AND VENT PIPING SHALL BE SCHEDULE 40 ABS (SOLID WALL) ONLY, WITH APPROVED TRANSITION COUPLINGS, ALL VALVES SHALL BE FULL-PORT AND ACCESSIBLE, ALL FIXTURES AND EQUIPMENT SHALL BE UPC-LISTED AND WATER-CONSERVING, HANGER AND SUPPORT SPACING SHALL COMPLY WITH CODE AND MANUFACTURER REQUIREMENTS, ALL PENETRATIONS OF RATED ASSEMBLIES SHALL BE PROPERLY SLEEVED AND FIRESTOPPED, CORROSION PROTECTION AND DIELECTRIC UNIONS SHALL BE PROVIDED WHERE REQUIRED, ALL SYSTEMS SHALL BE TESTED AND INSPECTED PRIOR TO CONCEALMENT, AND LISTED FIXTURE AND MATERIAL SELECTIONS ARE BASIS-OF-DESIGN AND MAY BE SUBSTITUTED WITH APPROVED EQUALS SUBJECT TO REVIEW AND APPROVAL BY THE ENGINEER OF RECORD, OWNER/HOA, AND AHJ.

15050.3 TESTS AND INSPECTIONS

ALL NEW SYSTEMS SHALL BE TESTED IN ACCORDANCE WITH (1) OF THE FOLLOWING METHODS:

1. WHOLE SYSTEM TEST WHERE THE OPENINGS IN THE PIPING SHALL BE TIGHTLY CLOSED, EXCEPT THE HIGHEST OPENING, AND THE SYSTEM FILLED WITH WATER TO POINT OF OVERFLOW. TEST TO BE HELD FOR MINIMUM 15 MINUTES.

2. SECTIONAL TEST WHERE EACH OPENING SHALL BE TIGHTLY PLUGGED, EXCEPT THE HIGHEST OPENING OF THE SECTION UNDER TEST, AND EACH SECTION SHALL BE FILLED WITH WATER, BUT NO SECTION SHALL BE TESTED WITH LESS THAN A 10 FOOT HEAD OF WATER (30 KPA). IN TESTING SUCCESSIVE SECTIONS, NOT LESS THAN THE UPPER 10 FEET (3048 MM) OF THE NEXT PRECEDING SECTION SHALL BE TESTED, SO THAT NO JOINT OR PIPE IN THE BUILDING (EXCEPT THE UPPERMOST 10 FEET (3048 MM) OF THE SYSTEM) SHALL HAVE BEEN SUBMITTED TO A TEST OF LESS THAN A 10 FOOT HEAD OF WATER (30 KPA). THE WATER SHALL BE KEPT IN THE SYSTEM, OR IN THE PORTION UNDER TEST, FOR NOT LESS THAN 15 MINUTES BEFORE INSPECTION STARTS.

3. RUNNING FLOW TEST OF REPLACEMENT SYSTEMS IN OCCUPIED BUILDINGS. ALL FIXTURES SHALL BE COMPLETELY FILLED TO FLOOD LEVEL AND SIMULTANEOUSLY DRAINED UNDER SUPERVISION OF AUTHORITY HAVING JURISDICTION. THIS TESTING METHOD SHALL ONLY BE UTILIZED WITH PRIOR APPROVAL BY LOCAL AUTHORITY HAVING JURISDICTION. THE DETERMINATION OF THE SUSCESS OR FAILURE OF A TEST SHALL BE AT THE SOLE DISCRETION OF THE AUTHORITY HAVING JURISDICTION.

15060 PLUMBING SPECIALTIES:

SCOPE: PROVIDE NEW FIXTURES, DRAINS, AND OTHER PLUMBING EQUIPMENT AS SPECIFIED HEREIN AND ON PLANS AND INSTALL TO OPERATE AS INTENDED.

15060.1 CLEANOUTS:

1. INTERIOR FINISHED FLOORS OR SIDEWALKS.

2. CONCRETE AND TILE FLOORS: "ZURN" A-1400-2 WITH SCORIATED NICKEL BRONZE TOP.

3. INTERIOR FINISHED WALLS: "ZURN" Z-1445-1.

4. OUTSIDE YARD CLEANOUTS: "ZURN" Z-1450-6 WITH 12"X12" POURED CONCRETE PAD AT GRADE.

NOTE: PROVIDE ALL CLEANOUTS WITH HEAVY THREADED BRONZE PLUGS.

PHSKC STAMP

"KE | AD"
KE|AD
BUILDING DESIGN TOGETHER
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERNEST H. SCHUMAN
STATE OF WASHINGTON
REGISTERED PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
PLUMBING SPECIFICATIONS

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P0.2

SCALE: 1'-0"=1"

© 2025 KE | AD, LLC

WATER HEATER SCHEDULE

TAG	MANUFACTURER	MODEL	CAPACITY (GAL)	HEATING INPUT	RECOVERY	EWT °F	LWT °F	ELECTRICAL				DIMENSION (in)		OP WEIGHT (LBS)	NOTES
								VOLT	PH	FLA	KW	DIA.	H		
WH-1	RHEEM	XE50M06ST45U1	40	40 MBH	21 GPH	-	90	240	1	-	-	20 1/4	48 1/4	106	1,2,3,4

NOTES:
1. POWER WIRING, CONDUIT AND DISCONNECT BY ELECTRICAL CONTRACTOR.
2. WITH EXPANSION TANK. SEE MISCELLANEOUS PLUMBING EQUIPMENT SCHEDULE.
3. PROVIDE TEMPERATURE CONTROLS.
4. PROVIDE INSULATION AND DRAIN PAN PER WSEC.

KEAD, LLC
11520 42ND AVENUE SOUTH
TUKWILA, WA 98168

PROJ. NAME: MEYDENBAUER
PROJ. NO: 25-048
BY: T.D.
DATE: 12/29/2025

SANITARY "SSCO 1" POC DRAINAGE FIXTURE UNIT CALCULATIONS

CALCULATIONS BASED ON 2021 SPC TABLES A103.1 AND 702.1.

APARTMENTS

FIXTURE	DRAINAGE FIXTURE UNITS	LEVEL								TOTAL QTY OF FIXTURES	TOTAL DRAINAGE FIXTURE UNITS
		B	1	2	3	4	5	6	R		
LAVATORY (PRIVATE)	1		2							2	2
WATER CLOSET (PRIVATE, TANK)	3		2							2	6
BATHTUB (PRIVATE)	2		1							1	2
SHOWER	2		1							1	2
CLOTHES WASHER	3		1							1	3
KITCHEN SINK (PRIVATE)	2		1							1	2
											17
											0

TOTAL DRAINAGE FIXTURE UNITS: 17
REQUIRED SEWER SIZE IN BUILDING: 6" @ 2% SLOPE

SANITARY PIPE SIZING (HORIZONTAL & VERTICAL)			
Per **UPC Table 703.2** (Horizontal) and **Table 703.1** (Vertical):			
Pipe Size	**Max DFU (Horizontal @ ¼"/ft)**	**Max DFU (Vertical)**	**Acceptable**
2"	8	24	☒ No
3"	35	48	☒ Borderline
4"	**216**	**240**	☑ YES
DESIGN CONCLUSION:			
4" sanitary main required for combined Units B-101 through B-104			
Branch lines sized per fixture load and code minimums			

PLUMBING FIXTURE SCHEDULE

MARK	FIXTURE	DESCRIPTION	LOCAL CONNECTION			
			W	V	CW	HW
WC-1	WATER CLOSET	MANUFACTURER: KOHLER, MODEL: VEIL WALL-HUNG TOILET (K-6299-0) (OR APPROVED EQUAL), TYPE: WALL-MOUNTED, GRAVITY / PRESSURE-ASSIST (CARRIER MOUNTED), FLUSH VOLUME: 1.28 GPF (OR BETTER), BOWL: ELONGATED MOUNING: WALL-HUNG WITH CONCEALED IN-WALL CARRIER, STANDARD: ASME A112.19.2 / CSA B45.1 PROVIDE WITH SINGLE PIECE CHROME PLATED WALL ESCUTCHEON. BRAIDED SS 3/8" FLEXIBLE SUPPLY HOSE.	4	2	1/2	-
LAV-1	LAVATORY	MAUFACTURER: KOHLER MODEL: CAXTON K-2210 (OR EQUAL), (TYPICAL UNDERMOUNT), MATERIAL: VITREOUS CHINA INTEGRAL OVERFLOW, DRAIN SIZE: 1-1/4", STANDARD: ASME A112.19.2 / CSA B45.1, BALANCING VALVE: KOHLER, MODEL: K-10215-4, KEY CHARACTERISTICS: 1.2 GPM, ASME A112.18.1	2	1-1/2	1/2	1/2
SH-1	SHOWER	SHOWER, KOHLER , RITE-TEMP PRESSURE-BALANCING VALVE (K-304-KS) THREE-WALL ALCOVE WITH CENTER DRAIN, WITH K-9459 GRAB BAR AND SHELF ACCESSORY KIT. KOHLER, K-8304-K VALVE BODY AND CARTRIDGE KIT. KOHLER K-TS15611-4H SHOWER VALVE TRIM SET WITH LEVER HANDLE, 2 GPM SHOWERHEAD WITH ARM AND ESCUTCHEON.	2	2	1/2	1/2
KS-1	SINK	KITCHEN SINK, SINGLE COMPARTMENT. GROHE 31615SDIO, TOP MOUNT, SELF RIMMING, 18 GA SS, THREE FAUCET HOLES, 20" W X 20" D X 8.5" H. KOHLER K10413 THREE HOLE FAUCET WITH VEGETABLE SPRAY, SINGLE LEVER, SWING SPOUT, 1.5 GPM. CRUMB CUP STRAINER, 1-1/2" TAILPIECE, 1-1/2" P-TRAP WITH CLEANOUT PLUG. BRASSCRAFT STOP VALVE, MODEL KTCR19, 1/4 TURN, DIE-CAST HANDLE, ANGLE PATTERN, 1/2" OD COMP. X 3/8" OD COMP.	2	2	1/2	1/2
BT-1	BATH TUB	MANUFACTURER: KOHLER VILLAGER, MODEL: K-715-0, KEY CHARACTERISTICS: CAST IRON, 60 IN	-	-	-	-
WB-1	CLOTHES WASHER	MANUFACTURER: LG ELECTRONICS, MODEL: WM4000HWA (OR EQUAL), FRONT-LOADING AUTOMATIC WASHING MACHINE, 4.5 CU. FT., HOT & COLD, 3/4" HOSE CONNECTION, STANDPIPE OR LAUNDRY SINK (PER UPC), 120V / 1-PHASE, 60 HZ	-	-	-	-
WH-1	WATER HEATER	MANUFACTURER: RHEEM, MODEL: XE40M06ST45U1, TYPE: ELECTRIC STORAGE, CAPACITY: 40 GALLONS	-	-	-	-
FD-1	FLOOR DRAIN	ZURN Z415-2, 2" ROUND TOP WITH SEDIMENT BUCKET, BOTTOM OUTLET, DUCO CAST IRON BODY, ADJUSTABLE COLLAR, TRAP PRIMER CONNECTION	-	-	-	-

PHSKC STAMP

"KE | AD"
KE|AD
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERNEST H. SCHUMANN
STATE OF WASHINGTON
22966
REGISTERED PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
PLUMBING SCHEDULES

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P0.3

SCALE: 1'-0"=1"

© 2025 KE | AD, LLC

CONTRACTORS NOTE:

1. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR DETERMINING THE ACTUAL LOCATION, ROUTING, DEPTH, SIZE, MATERIALS, AND CONDITION OF THE EXISTING UNDERGROUND UTILITIES SYSTEM. THIS INCLUDES:
   - A. PERFORMING FIELD INVESTIGATION PRIOR TO DEMOLITION, INCLUDING VISUAL TRACING, VALVE BOX/VAULT VERIFICATION, AND POINT-TO-POINT CONFIRMATION.
   - B. COORDINATING AND PERFORMING REQUIRED UTILITY LOCATES AND PRIVATE LOCATING AS NEEDED (ELECTROMAGNETIC LOCATING, LINE TRACING, GPR WHERE APPROPRIATE).
   - C. PERFORMING TEST PITS / POTHOLING AND SELECTIVE EXPOSURE TO CONFIRM ALIGNMENT, DEPTH, AND TIE-IN POINTS.
2. ENGINEER SHALL BE NOTIFIED OF ANY DEVIATIONS FROM ASSUMED CONDITIONS; DO NOT PROCEED WITHOUT DIRECTION.

*GENERAL NOTE:

1.) DEPICTED PROPERTY LINE AND BASE MAP INFORMATION ARE BASED ON PRIOR DATA PROVIDED TO KEAD, LLC BY THE CLIENT. THEY ARE SHOWN FOR REFERENCE ONLY AND HAVE NOT BEEN VERIFIED.

*(TYPICAL ALL SHEETS)

SITE DATA

LAND USE:	MULTI-FAMILY DWELLING
PRESENT USE:	CONDOMINIUM (RESIDENTIAL)
LAND SQ.FT.:	141,381
ACRES:	3.25
ZONING:	R-30
PARCEL:	639000-0000
JURISDICTION:	BELLEVUE
PROPERTY TYPE:	(K) MEYDENBAUER CONDOMINIUM
ADDRESS:	101 1ST AVE SE
TOWNSHIP:	SW-32-25-5


PLUMBING KEYNOTES:

1. SEE CORRESPONDING PLUMBING SHT(S) FOR CONTINUATION, TYP.
2. TIE IN TO THE 6" EXISTING WASTE DRAIN LINE AS DEPICTED BELOW.
3. CLOSEST EXISTING MANHOLE IS ON MEYDENBAUER WAY SE IN THE NORTHEAST CORNER OF PROPERTY RIM/EL: = 42.00'±

- ALL PLUMBING NOTES MAY NOT BE USED.

LEGEND

- TOP OF WALL
- LOT LINE
- DRAINAGE CHANNEL
- CHAIN LINK FENCE
- ROAD BITUMEN EDGE
- CURB & CHANNEL INVERT
- CURB LIP
- CURB TOP BACK
- CURB TOP FRONT
- EXISTNG SEWER
- BUILDING LINE
- HV TRANSMISSION LINE
- TIE IN POINT

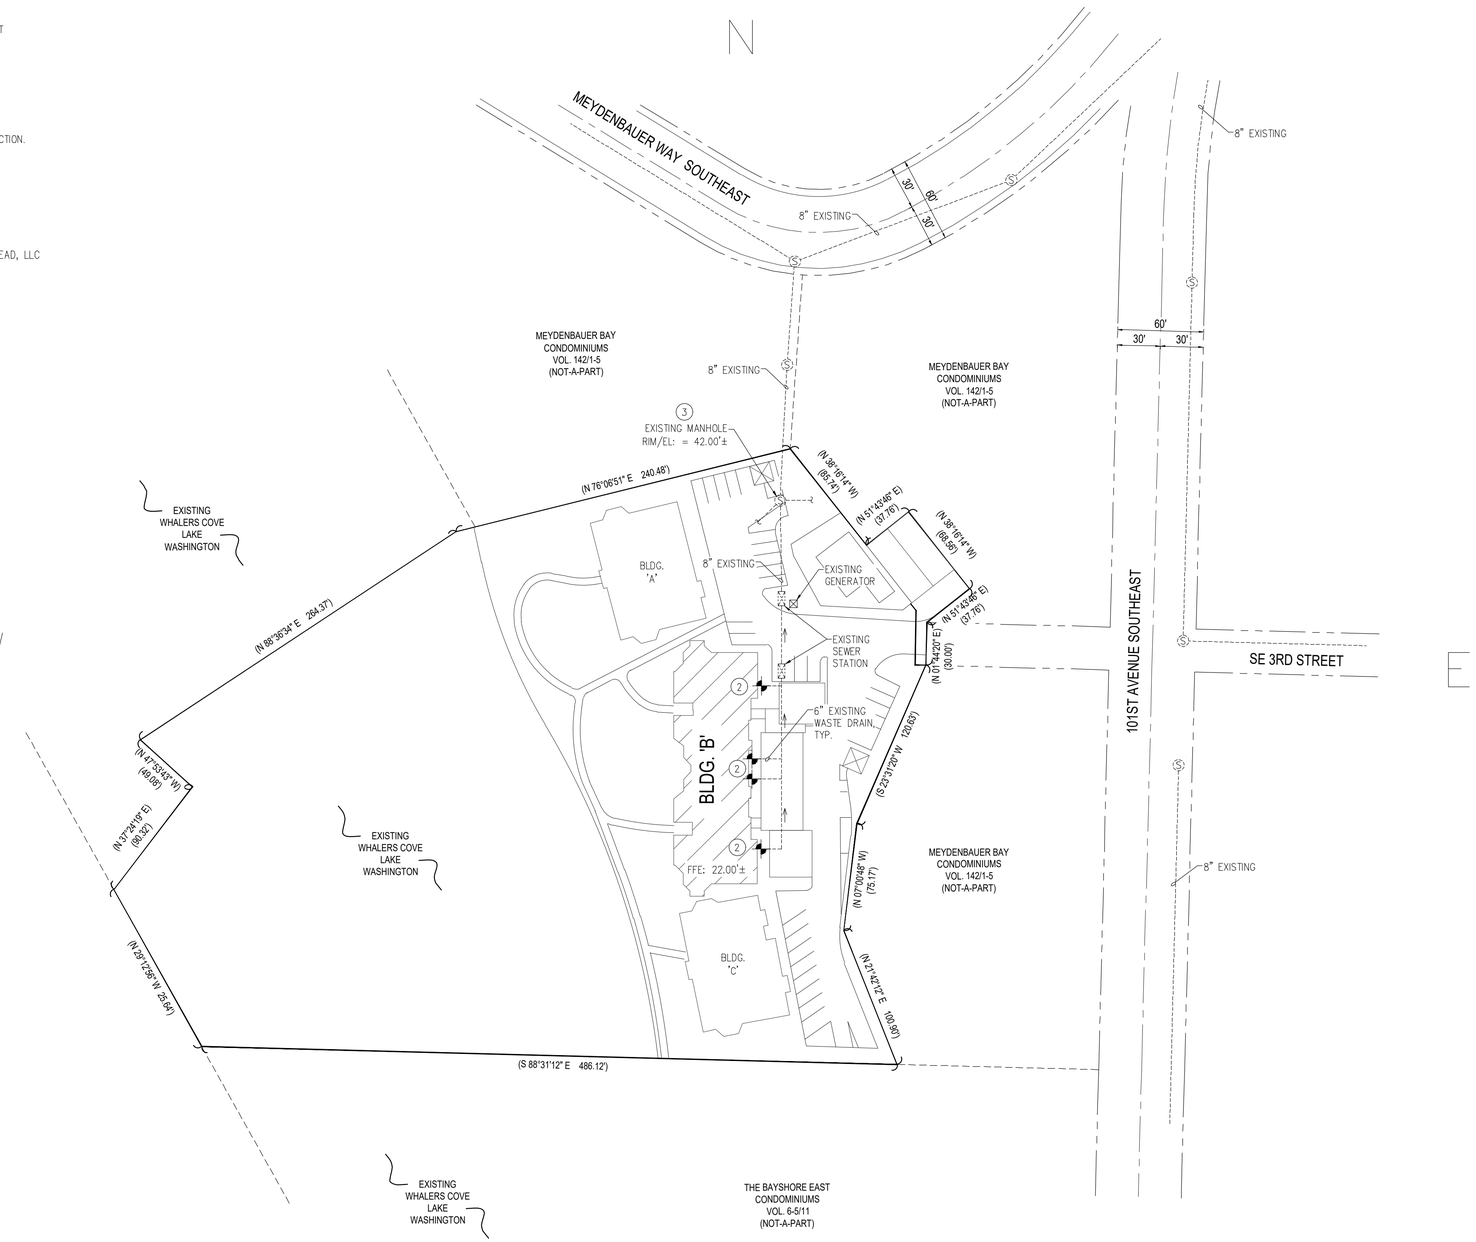

1 PLUMBING SITE PLAN

SCALE: 1" = 50'

0' 25' 50' 100' 200'

NORTH

PHSKC STAMP

"KE | AD"

HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000

SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERNST H. SCHIMPF — STATE OF WASHINGTON — REGISTERED PROFESSIONAL ENGINEER

EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
PLUMBING SITE PLAN

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P1.0

SCALE: 1"=50'-0"

© 2025 KE | AD, LLC

DEMOLITION NOTES:

1. DEMOLITION WORK SHALL BE LIMITED TO PLUMBING PIPING, FITTINGS, AND FIXTURES INDICATED TO BE REMOVED ON THE DRAWINGS. PROTECT ALL REMAINING PLUMBING SYSTEMS, STRUCTURAL ELEMENTS, FINISHES, AND ADJACENT OCCUPIED UNITS.
2. EXISTING SANITARY SEWER PIPING SERVING UNITS B-101 THROUGH B-104 SHALL BE SELECTIVELY DEMOLISHED AS SHOWN. VERIFY ALL PIPING ROUTES, ELEVATIONS, AND CONNECTION POINTS PRIOR TO REMOVAL.
3. MAINTAIN CONTINUOUS SANITARY SERVICE TO UNAFFECTED UNITS. COORDINATE DEMOLITION SEQUENCING TO MINIMIZE SERVICE INTERRUPTIONS. PROVIDE TEMPORARY BYPASS PIPING IF REQUIRED.
4. CAP, PLUG, OR SEAL ALL OPEN SEWER PIPING IMMEDIATELY AFTER DEMOLITION TO PREVENT SEWER GAS RELEASE, DEBRIS ENTRY, AND CONTAMINATION.
5. REMOVE ABANDONED PIPING BACK TO THE NEAREST ACTIVE BRANCH, RISER, OR MAIN. ABANDONED PIPING CONCEALED IN WALLS OR SLABS SHALL BE CAPPED AND LEFT IN PLACE UNLESS OTHERWISE NOTED.
6. EXISTING CLEANOUTS, VENTS, AND CONNECTIONS NOT REUSED SHALL BE REMOVED OR PERMANENTLY CAPPED IN ACCORDANCE WITH CODE.
7. PROTECT EXISTING CONCRETE SLABS, POST-TENSION ELEMENTS, WATERPROOFING, AND STRUCTURAL COMPONENTS DURING DEMOLITION. SAWCUT SLAB PENETRATIONS NEATLY WHERE REQUIRED AND COORDINATE WITH STRUCTURAL DRAWINGS.
8. ANY UNFORESEEN CONDITIONS, INCLUDING DETERIORATED PIPING, UNDOCUMENTED CONNECTIONS, OR STRUCTURAL CONFLICTS, SHALL BE REPORTED TO THE ENGINEER OF RECORD PRIOR TO PROCEEDING.

VERICAL LIMITS & VENTING NOTE:

REMOVE AND REPLACE VERTICAL PIPING AS REQUIRED TO ACCOMMODATE NEW WORK. PROVIDE MINIMUM 36" OF VERTICAL PIPE EXPOSURE (OR AS REQUIRED FOR FITTINGS AND COUPLINGS) AND MAINTAIN MINIMUM TEN (10) PIPE DIAMETERS FROM BASE OF STACK FOR HORIZONTAL CONNECTIONS; DO NOT PERFORM PARTIAL OR NOTCHED REPAIRS. MAINTAIN CONTINUOUS VENTING OF ALL SANITARY SYSTEMS DURING DEMOLITION AND INSTALLATION; DO NOT LEAVE OPEN OR UNVENTED STACKS OR BRANCHES AT ANY TIME. PROVIDE TEMPORARY VENT EXTENSIONS OR BYPASS VENTING AS REQUIRED TO PREVENT TRAP SEAL LOSS OR SEWER GAS MIGRATION. RECONNECT ALL VENT PIPING TO EXISTING VENT SYSTEMS ABOVE FLOOD RIM LEVEL OR AS REQUIRED BY UPC AND COORDINATE PHASING TO ENSURE EACH FIXTURE REMAINS PROPERLY VENTED THROUGHOUT CONSTRUCTION.

STACK LOCATION NOTE: 1

CONTRACTOR SHALL FIELD VERIFY ALL WASTE STACK LOCATIONS DURING DEMOLITION. BUILDING B IS BELIEVED TO INCLUDE TWELVE (12) APPARENT SANITARY WASTE STACKS / VERTICAL WASTE RISERS CONSISTING OF FOUR (4) 4-INCH STACKS AND EIGHT (8) 3-INCH RISERS. FINAL QUANTITIES AND LOCATIONS SHALL BE CONFIRMED IN THE FIELD DURING DEMOLITION AND COORDINATED WITH THE ENGINEER PRIOR TO REPLACEMENT.

FINISH RESTORATION: 2

RESTORE ALL FLOORING, TILE, WALL, CEILING, BASE, AND OTHER FINISHES DISTURBED BY THE WORK TO MATCH PRE-CONSTRUCTION CONDITIONS AS CLOSELY AS PRACTICABLE. CONTRACTOR SHALL DOCUMENT EXISTING FINISHES PRIOR TO DEMOLITION AND INCLUDE MATCHING MATERIAL, LABOR, AND INSTALLATION IN BASE BID. OWNER-REQUESTED UPGRADES BEYOND EXISTING CONDITIONS ARE NOT INCLUDED UNLESS SPECIFICALLY AUTHORIZED. AT ROOMS WITH EXISTING HEATED COIL FLOORING SYSTEM, REMOVE AND REPLACE WITH A NEW HEATED COIL FLOORING SYSTEM TO MATCH EXISTING.

CONTRACTORS NOTE:

1. THE CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR DETERMINING THE ACTUAL LOCATION, ROUTING, DEPTH, SIZE, MATERIALS, AND CONDITION OF THE EXISTING UNDERGROUND UTILITIES SYSTEM. THIS INCLUDES:
   - A. PERFORMING FIELD INVESTIGATION PRIOR TO DEMOLITION, INCLUDING VISUAL TRACING, VALVE BOX/VAULT VERIFICATION, AND POINT-TO-POINT CONFIRMATION.
   - B. COORDINATING AND PERFORMING REQUIRED UTILITY LOCATES AND PRIVATE LOCATING AS NEEDED (ELECTROMAGNETIC LOCATING, LINE TRACING, GPR WHERE APPROPRIATE).
   - C. PERFORMING TEST PITS / POTHOLING AND SELECTIVE EXPOSURE TO CONFIRM ALIGNMENT, DEPTH, AND TIE-IN POINTS.
2. ENGINEER SHALL BE NOTIFIED OF ANY DEVIATIONS FROM ASSUMED CONDITIONS; DO NOT PROCEED WITHOUT DIRECTION.

SCOPE EXCEPTION: 2

EXISTING SANITARY PIPING PREVIOUSLY REPLACED UNDER CITY OF BELLEVUE PERMIT RECORD #25 129840 UA SHALL REMAIN AND IS NOT PART OF THE CURRENT DEMOLITION OR REPLACEMENT SCOPE EXCEPT WHERE SPECIFICALLY INDICATED. CONTRACTOR SHALL FIELD VERIFY LIMITS AND CONNECTION POINTS PRIOR TO ADJACENT WORK.


KEYNOTES:

1. DEMOLISH EXISTING SANITARY WASTE & VENT PIPING AS SHOWN.
2. REMOVE EXISTING UNDER-SLAB SANITARY PIPING AS INDICATED.
3. DEMOLISH EXISTING VERTICAL WASTE STACK TO POINT INDICATED.
4. REMOVE EXISTING FIXTURE AND ASSOCIATED TRAP, BRANCH, AND VENT PIPING AS SHOWN.
5. SAWCUT AND REMOVE CONCRETE SLAB AS REQUIRED FOR PLUMBING DEMOLITION.
6. CORE DRILL OR SAWCUT SLAB OPENINGS ONLY AS REQUIRED.
7. NO CUTTING OR CORING OF STRUCTURAL MEMBERS OR POST-TENSION CABLES.
8. REMOVE ABANDONED CLEANOUT AND SEAL PIPE FLUSH WITH WALL OR SLAB.
9. REMOVE EXISTING SEWER CONNECTION BACK TO NEAREST EXTERIOR CLEANOUT AS SHOWN.
10. REMOVE EXISTING FIXTURE. THEN RESTORE ALL SURFACES, FLOORING, WALLS, FIXTURES AND CEILINGS DISTURBED BY PLUMBING WORK TO MATCH EXISTING CONDITIONS UNLESS NOTED OTHERWISE.

- NOT ALL KEYNOTES MAY BE USED.

LEGEND

- GRID LINE
- EXISTING PIPE UNDER FOUNDATION
- WALL
- PRIOR DEMO AREA CITY OF BELLEVUE PERMIT RECORD #25 129840 UA
- INDICATED AREA OF DEMOLITION
- TIE IN POINT

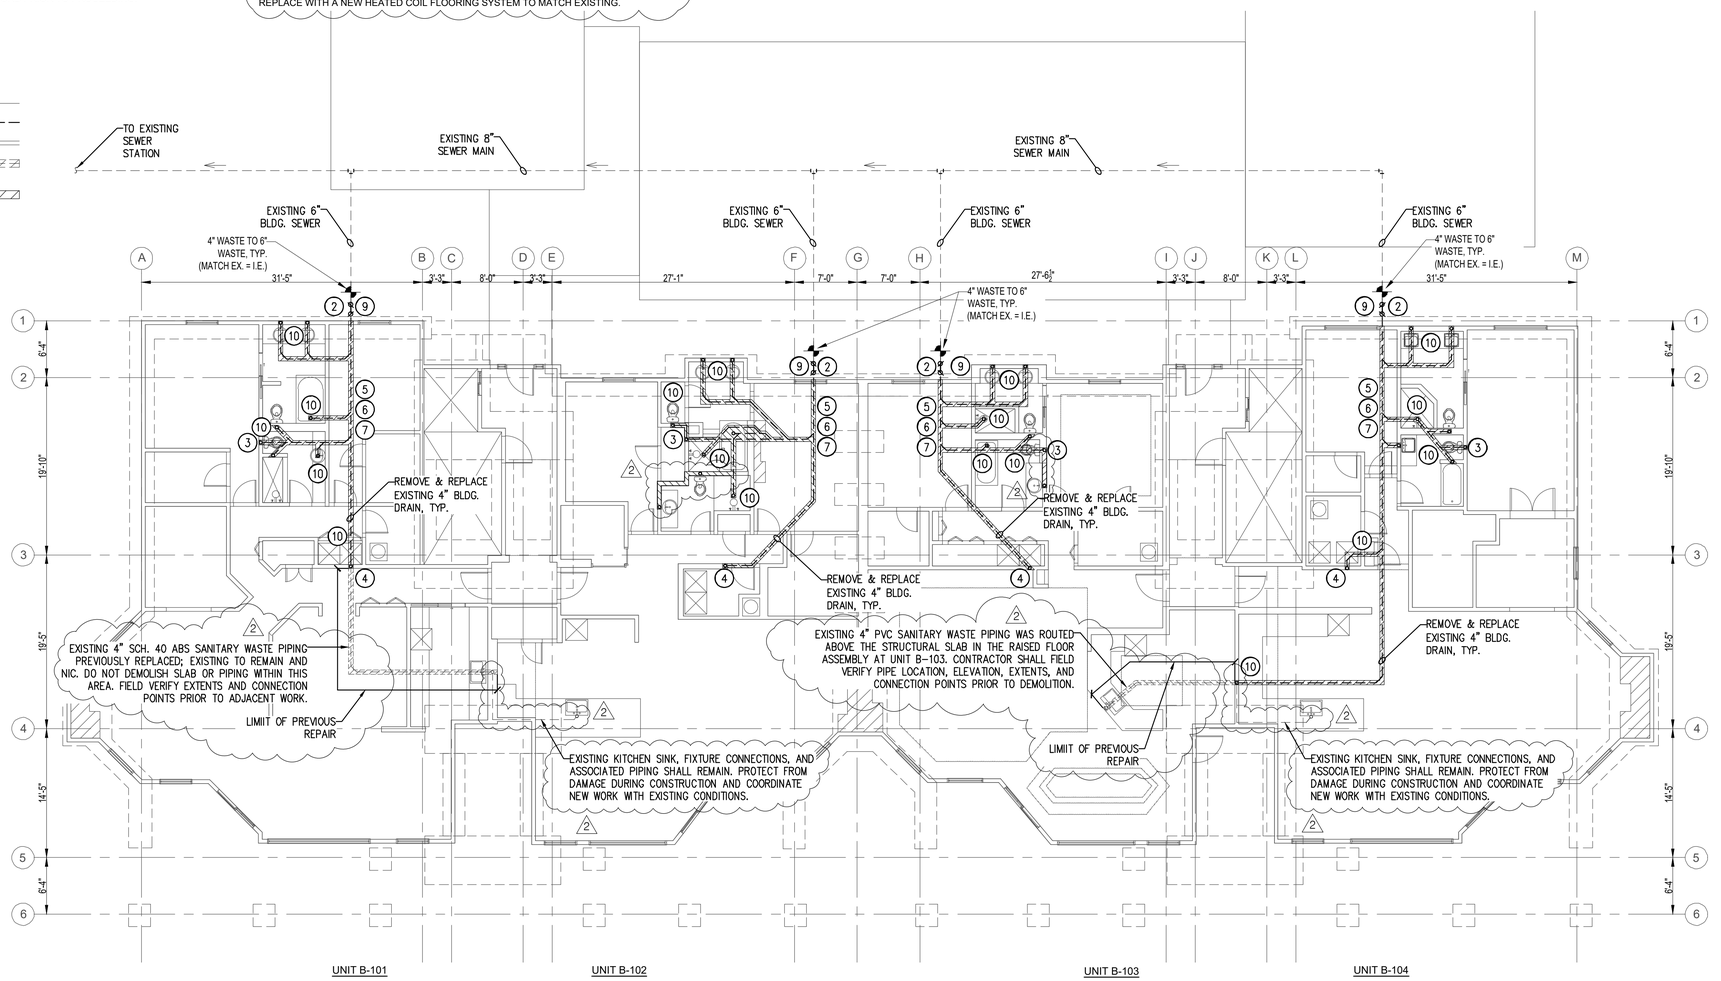

1 WASTE PLUMBING DEMOLITION PLAN

SCALE: 1/8" = 1'

NORTH

PHSKC STAMP

"KE | AD"
KE|AD
BUILDING DESIGN | PROJECT MANAGEMENT
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com
ERIC H. SCHLEIF
STATE OF WASHINGTON
REGISTERED PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
BUILDING 'B
WASTE PLUMBING
DEMOLITION PLAN

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P1.01

SCALE: 1/8"=1'

© 2025 KE | AD, LLC

CONSTRUCTION NOTES:

1. ALL NEW SANITARY SEWER PIPING SHALL COMPLY WITH THE CITY OF BELLEVUE PLUMBING CODE (UPC AS AMENDED) AND WASHINGTON STATE AMENDMENTS.
2. NEW SANITARY PIPING SHALL BE SCHEDULE 40 ABS (SOLID WALL) ONLY, PVC PIPING IS NOT PERMITTED. INSTALL PIPING IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND CODE REQUIREMENTS.
3. PROVIDE MINIMUM SLOPES FOR HORIZONTAL DRAINAGE PIPING AS REQUIRED BY CODE (¼" PER FOOT FOR PIPING 2½" AND SMALLER, UNLESS OTHERWISE PERMITTED).
4. ALL NEW PIPING SHALL BE SUPPORTED AND RESTRAINED IN ACCORDANCE WITH CODE AND SEISMIC REQUIREMENTS. PROVIDE ISOLATION FROM BUILDING STRUCTURE TO PREVENT NOISE TRANSMISSION.
5. CONNECT NEW SEWER PIPING TO EXISTING ACTIVE SYSTEMS AT REPLACEMENT OF UNDER-SLAB PIPING STARTING AT SIDE SEWER CONNECTION JUST OUTSIDE BUILDING FOOTPRINT (18'). ALL CONNECTIONS SHALL BE MADE USING APPROVED FITTINGS AND TRANSITION COUPLINGS WHERE REQUIRED.
6. PROVIDE NEW CLEANOUTS AT THE BASE OF STACKS, CHANGES IN DIRECTION GREATER THAN 45 DEGREES, AND AT INTERVALS REQUIRED BY CODE. CLEANOUTS SHALL REMAIN ACCESSIBLE AFTER CONSTRUCTION.
7. VENTING SHALL BE PROVIDED FOR ALL FIXTURES IN ACCORDANCE WITH CODE. EXISTING VENTS MAY BE REUSED ONLY WHERE VERIFIED TO BE CODE-COMPLIANT AND IN SERVICEABLE CONDITION.
8. ALL FLOOR, WALL, AND SLAB PENETRATIONS SHALL BE SEALED WITH APPROVED FIRE-STOPPING AND WATERPROOFING SYSTEMS AS REQUIRED BY CODE AND BUILDING STANDARDS.
9. WHERE PIPING PASSES THROUGH RATED ASSEMBLIES, PROVIDE FIRE-RESISTIVE PROTECTION TO MAINTAIN THE REQUIRED RATING.
10. TEST ALL NEW SANITARY SEWER PIPING PRIOR TO CONCEALMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BELLEVUE PLUMBING CODE AND WITNESSED BY THE AUTHORITY HAVING JURISDICTION IF REQUIRED.
11. AFTER TESTING AND APPROVAL, RESTORE ALL FINISHES, FLOORING, AND WALL SURFACES DISTURBED BY THE WORK TO MATCH EXISTING CONDITIONS UNLESS OTHERWISE NOTED.
12. CONTRACTOR SHALL COORDINATE PLUMBING WORK WITH ARCHITECTURAL, STRUCTURAL, AND OTHER TRADES TO AVOID CONFLICTS AND ENSURE PROPER CLEARANCES.
13. UPON COMPLETION, REMOVE ALL CONSTRUCTION DEBRIS AND ABANDONED MATERIALS FROM THE SITE. LEAVE PLUMBING SYSTEMS CLEAN, OPERATIONAL, AND READY FOR USE.
14. REMOVE AND REINSTALL EXISTING GLASS SHOWER OR BATHTUB PARTITIONS AND DOORS AS NEEDED TO REMOVE SHOWER PAN OR BATHTUB AND PERFORM UNDERGROUND PIPE REPLACEMENT. WHEN REINSTALLING WALL OR CEILING MOUNTED CHANNELS OR BACKPLATE HINGES, SET FASTENERS IN 100% SILICONE SEALANT TO PROVIDE WATERTIGHT ATTACHMENT.

2

LEGEND

- GRID LINE
- PROPOSED RE- PIPE
- WALL
- TIE IN POINT
- EXISTING PIPING TO REMAIN

LINING VS REPLACEMENT AT AREAS OUTSIDE OF BUILDING FOOTPRINT NOTE

PIPE LINING IS ONLY PERMITTED OUTSIDE OF THE BUILDING FOOTPRINT. UNDER-SLAB PIPING WITHIN THE BUILDING FOOTPRINT SHALL BE FULLY REMOVED AND REPLACED. VERIFY FIELD CONDITIONS AND COORDINATE WITH ENGINEER PRIOR TO PROCEEDING.

2

CONCRETE RESTORATION NOTE

SAWCUT AND REMOVE CONCRETE AS REQUIRED; REPLACE TO MATCH EXISTING THICKNESS, REINFORCEMENT, AND FINISH. PROVIDE MIN. 3,000 PSI CONCRETE, COMPACT SUBGRADE, AND DOWEL INTO EXISTING SLAB. MATCH ADJACENT SURFACES.

SLEEVE PENETRATION NOTE

PROVIDE SLEEVES AT ALL PIPE PENETRATIONS THROUGH CONCRETE AND WALLS. SIZE SLEEVES TO ALLOW FOR PIPE MOVEMENT AND SEAL WITH APPROVED FIRESTOP OR WATERPROOFING SYSTEM AS REQUIRED.

INSPECTION & TESTING NOTE

CONTRACTOR SHALL PERFORM ALL REQUIRED WATER TESTING AND INSPECTIONS OF PIPING SYSTEMS IN ACCORDANCE WITH 2021 UPC CODE AND AHJ REQUIREMENTS; COORDINATE ALL INSPECTIONS AND PROVIDE APPROVALS PRIOR TO COVERING WORK.

INSPECTION & TESTING NOTE

CONTRACTOR SHALL PERFORM ALL REQUIRED WATER TESTING AND INSPECTIONS OF PIPING SYSTEMS IN ACCORDANCE WITH 2021 UPC CODE AND AHJ REQUIREMENTS; COORDINATE ALL INSPECTIONS AND PROVIDE APPROVALS PRIOR TO COVERING WORK.

SCOPE, MATERIALS AND INSTALLATION:

ALL WORK SHALL COMPLY WITH THE CONTRACT DOCUMENTS INCLUDING DRAWINGS, SCOPE OF REPAIR (SOR), AND PROJECT SPECIFICATIONS; WHERE CONFLICTS EXIST, THE MORE STRINGENT REQUIREMENT SHALL GOVERN AS DETERMINED BY THE ENGINEER OF RECORD.

WORK INCLUDES REMOVAL AND REPLACEMENT OF ALL SANITARY WASTE AND VENT PIPING SERVING BUILDING B (UNITS B-101 THRU B-104), WITH AN EXCEPTION TO CITY OF BELLEVUE PERMIT RECORD #25 125840 UA, FROM FIXTURE CONNECTION TO EXISTING SIDE SEWER CONNECTION OUTSIDE THE BUILDING FOOTPRINT, INCLUDING ALL UNDER-SLAB PIPING, VERTICAL STACKS, BRANCH LINES, AND ASSOCIATED FITTINGS AND APPURTENANCES.

ALL NEW SANITARY PIPING SHALL BE SCHEDULE 40 ABS (SOLID WALL) ONLY; PVC AND OTHER MATERIALS ARE NOT PERMITTED. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS, INCLUDING INVERT ELEVATIONS AND CONNECTION POINTS, PRIOR TO INSTALLATION AND SHALL NOT PROCEED WHERE DISCREPANCIES EXIST WITHOUT ENGINEER DIRECTION.

CONTRACTOR SHALL MAINTAIN CONTINUOUS SANITARY SERVICE TO OCCUPIED UNITS AND SHALL PROVIDE TEMPORARY BYPASS SYSTEMS, PHASING, AND SEQUENCING AS REQUIRED. PIPE LINING IS NOT PERMITTED UNDER THE BUILDING FOOTPRINT; UNDER-SLAB PIPING SHALL BE FULLY REMOVED AND REPLACED.

ALL WORK SHALL BE INSTALLED PER UPC (WA STATE), CITY OF BELLEVUE AMENDMENTS, AND MANUFACTURER REQUIREMENTS. CONTRACTOR SHALL PROVIDE COMPLETE RESTORATION OF ALL DISTURBED AREAS INCLUDING SLABS, FLOORING, WALLS, CEILINGS, AND FINISHES TO MATCH EXISTING CONDITIONS. TEST AND INSPECT ALL SYSTEMS PRIOR TO CONCEALMENT AND PROVIDE AS-BUILT DOCUMENTATION UPON COMPLETION.

STACK LOCATION NOTE:


CONTRACTOR SHALL FIELD VERIFY ALL WASTE STACK LOCATIONS DURING DEMOLITION. BUILDING B IS BELIEVED TO INCLUDE TWELVE (12) APPARENT SANITARY WASTE STACKS / VERTICAL WASTE RISERS CONSISTING OF FOUR (4) 4-INCH STACKS AND EIGHT (8) 3-INCH RISERS. FINAL QUANTITIES AND LOCATIONS SHALL BE CONFIRMED IN THE FIELD DURING DEMOLITION AND COORDINATED WITH THE ENGINEER PRIOR TO REPLACEMENT.

PLUMBING GENERAL NOTES (WASTE)

- NOT ALL KEYNOTES MAY BE USED.
- SEE CORRESPONDING RISER DIAGRAM FOR SIZING.

PLUMBING KEYNOTES (WASTE)

1. 4" TO 6" WASTE, WITH 2-WAY SURFACE CLEANOUT, SLOPE 1/4" PER FOOT. TIE TO EXISTING 8" WASTE, FIELD VERIFY EXISTING CONDITIONS.
2. (E) WATER CLOSET, (N) 1/2" DCW, 3" W, 2" V. FLOOR-MOUNTED
3. (E) WATER CLOSET, (N) 1/2" DCW, 4" W, 2" V. WALL-MOUNTED
4. (E) LAVATORY, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V. 1 1/4 TRAP
5. (E) KITCHEN SINK, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V. DOUBLE-BOWL
6. (E) SHOWER, (N) 1/2" DCW, 1/2" DHW, 2" FD WITH 2" W, 1 1/2" V. INSTALL PRESSURE-BALANCED OR THERMOSTATIC MIXING VALVE.
7. (E) TUB, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
8. (E) DISHWASHER, (N) 1/2" DHW, PROVIDE APPROVED TEE WITH AIR GAP, AIR GAP MUST BE INSTALLED WITH THE FLOOD LEVEL MARKING AT OR ABOVE THE FLOOD LEVEL RIM OF THE SINK OR DRAINBOARD WHICHEVER IS HIGHER.
9. (E) SINK, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
10. SERVICE SINK (FBO), 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
11. 3" FD WITH 3" W, 2" V. PROVIDE PROSET TRAP GUARD INSERT.
12. PIPING UP FROM UNDER FOUNDATION.
13. WASHING MACHINE BOX (WB), 3/4" DCW, 3/4" DHW, 2" W, 1 1/2" V.
14. (E) BIDET, 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
15. (E) URINAL, 3/4" DCW, 2" W, 1 1/2" V.
16. PIPING UP TO ADJACENT FLOOR.

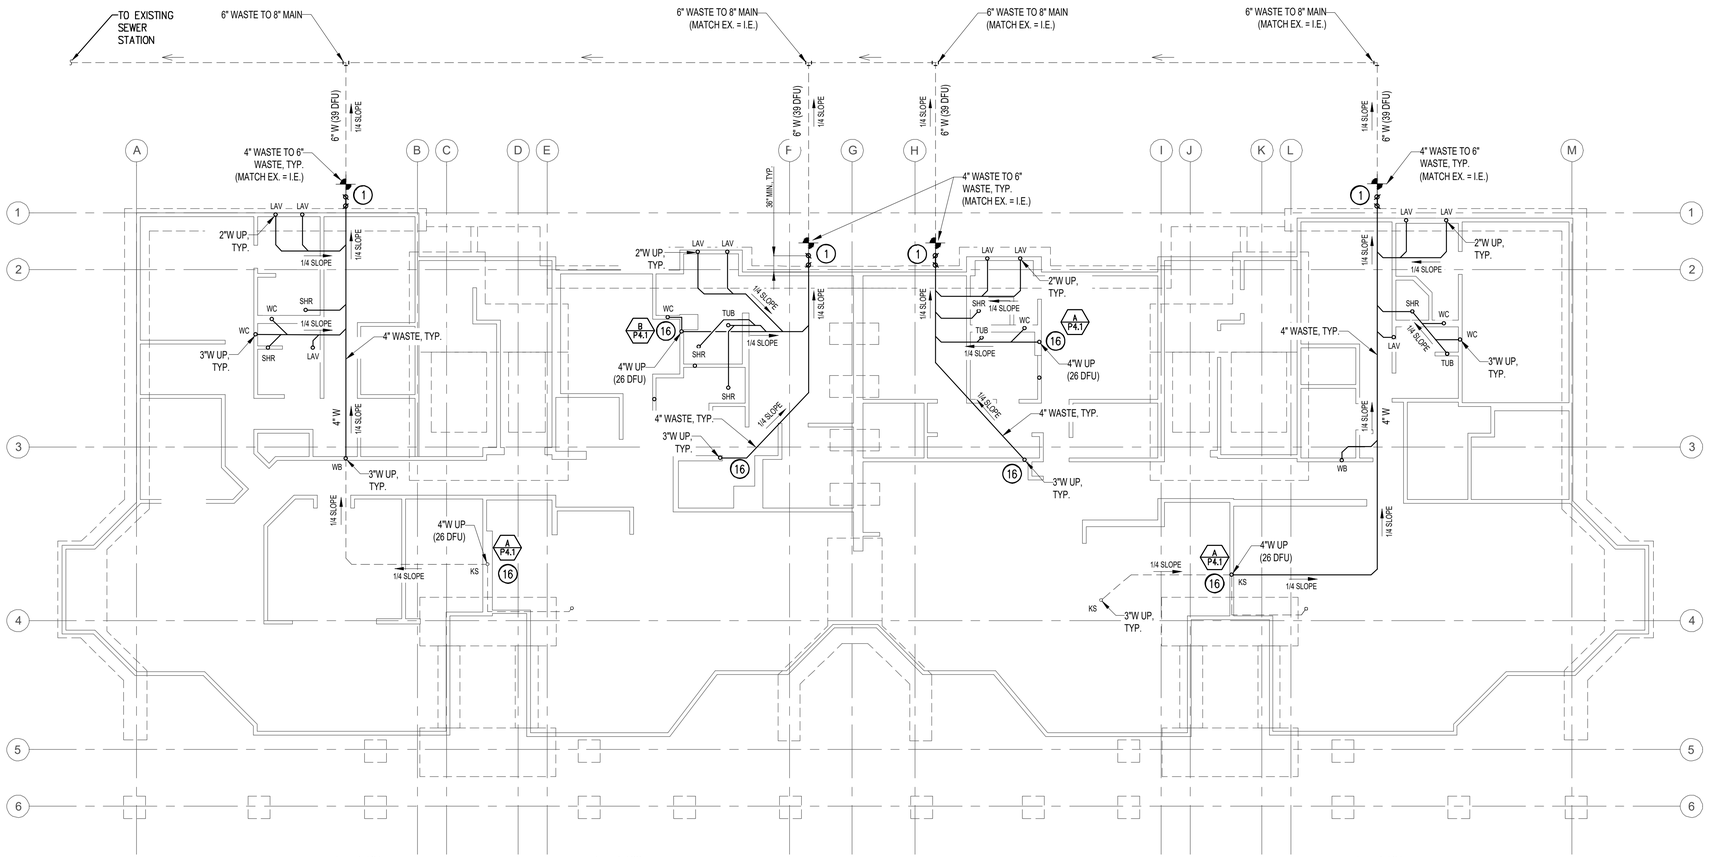

NOTE:

VERIFY ALL EXISTING INVERT ELEVATIONS PRIOR TO INSTALLATION; REPORT DISCREPANCIES BEFORE PROCEEDING.

1 WASTE PLUMBING FOUNDATION PLAN

SCALE: 1/8" = 1'

NORTH

PHSKC STAMP

"KE | AD"
KE|AD
BUILDING DESIGN + PLANNING
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com
ERNST H. SCHUMANN
STATE OF WASHINGTON
REGISTERED PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
BUILDING 'B'
WASTE PLUMBING
FOUNDATION PLAN

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P1.02

SCALE: 1/8"=1'

© 2025 KE | AD, LLC

CONSTRUCTION NOTES:

1. ALL NEW SANITARY SEWER PIPING SHALL COMPLY WITH THE CITY OF BELLEVUE PLUMBING CODE (UPC AS AMENDED) AND WASHINGTON STATE AMENDMENTS.
2. NEW SANITARY PIPING SHALL BE SCHEDULE 40 ABS (SOLID WALL) ONLY, PVC PIPING IS NOT PERMITTED. INSTALL PIPING IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND CODE REQUIREMENTS.
3. PROVIDE MINIMUM SLOPES FOR HORIZONTAL DRAINAGE PIPING AS REQUIRED BY CODE (¼" PER FOOT FOR PIPING 2½" AND SMALLER, UNLESS OTHERWISE PERMITTED).
4. ALL NEW PIPING SHALL BE SUPPORTED AND RESTRAINED IN ACCORDANCE WITH CODE AND SEISMIC REQUIREMENTS. PROVIDE ISOLATION FROM BUILDING STRUCTURE TO PREVENT NOISE TRANSMISSION.
5. CONNECT NEW SEWER PIPING TO EXISTING ACTIVE SYSTEMS AT LOCATIONS SHOWN. ALL CONNECTIONS SHALL BE MADE USING APPROVED FITTINGS AND TRANSITION COUPLINGS WHERE REQUIRED.
6. PROVIDE NEW CLEANOUTS AT THE BASE OF STACKS, CHANGES IN DIRECTION GREATER THAN 45 DEGREES, AND AT INTERVALS REQUIRED BY CODE. CLEANOUTS SHALL REMAIN ACCESSIBLE AFTER CONSTRUCTION.
7. VENTING SHALL BE PROVIDED FOR ALL FIXTURES IN ACCORDANCE WITH CODE. EXISTING VENTS MAY BE REUSED ONLY WHERE VERIFIED TO BE CODE-COMPLIANT AND IN SERVICEABLE CONDITION.
8. ALL FLOOR, WALL, AND SLAB PENETRATIONS SHALL BE SEALED WITH APPROVED FIRE-STOPPING AND WATERPROOFING SYSTEMS AS REQUIRED BY CODE AND BUILDING STANDARDS.
9. WHERE PIPING PASSES THROUGH RATED ASSEMBLIES, PROVIDE FIRE-RESISTIVE PROTECTION TO MAINTAIN THE REQUIRED RATING.
10. TEST ALL NEW SANITARY SEWER PIPING PRIOR TO CONCEALMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BELLEVUE PLUMBING CODE AND WITNESSED BY THE AUTHORITY HAVING JURISDICTION IF REQUIRED.
11. AFTER TESTING AND APPROVAL, RESTORE ALL FINISHES, FLOORING, AND WALL SURFACES DISTURBED BY THE WORK TO MATCH EXISTING CONDITIONS UNLESS OTHERWISE NOTED.
12. CONTRACTOR SHALL COORDINATE PLUMBING WORK WITH ARCHITECTURAL, STRUCTURAL, AND OTHER TRADES TO AVOID CONFLICTS AND ENSURE PROPER CLEARANCES.
13. UPON COMPLETION, REMOVE ALL CONSTRUCTION DEBRIS AND ABANDONED MATERIALS FROM THE SITE. LEAVE PLUMBING SYSTEMS CLEAN, OPERATIONAL, AND READY FOR USE.

SCOPE, MATERIALS AND INSTALLATION:

ALL WORK SHALL COMPLY WITH THE CONTRACT DOCUMENTS INCLUDING DRAWINGS, SCOPE OF REPAIR (SOR), AND PROJECT SPECIFICATIONS; WHERE CONFLICTS EXIST, THE MORE STRINGENT REQUIREMENT SHALL GOVERN AS DETERMINED BY THE ENGINEER OF RECORD.

WORK INCLUDES REMOVAL AND REPLACEMENT OF ALL SANITARY WASTE AND VENT PIPING SERVING BUILDING B (UNITS B-101 THRU B-104), WITH AN EXCEPTION TO CITY OF BELLEVUE PERMIT RECORD #25 129840 UA. FROM FIXTURE CONNECTION TO EXISTING SIDE SEWER CONNECTION OUTSIDE THE BUILDING FOOTPRINT, INCLUDING ALL UNDER-SLAB PIPING, VERTICAL STACKS, BRANCH LINES, AND ASSOCIATED FITTINGS AND APPURTENANCES.

ALL NEW SANITARY PIPING SHALL BE SCHEDULE 40 ABS (SOLID WALL) ONLY; PVC AND OTHER MATERIALS ARE NOT PERMITTED. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS, INCLUDING INVERT ELEVATIONS AND CONNECTION POINTS, PRIOR TO INSTALLATION AND SHALL NOT PROCEED WHERE DISCREPANCIES EXIST WITHOUT ENGINEER DIRECTION.

CONTRACTOR SHALL MAINTAIN CONTINUOUS SANITARY SERVICE TO OCCUPIED UNITS AND SHALL PROVIDE TEMPORARY BYPASS SYSTEMS, PHASING, AND SEQUENCING AS REQUIRED. PIPE LINING IS NOT PERMITTED UNDER THE BUILDING FOOTPRINT; UNDER-SLAB PIPING SHALL BE FULLY REMOVED AND REPLACED.


ALL WORK SHALL BE INSTALLED PER UPC (WA STATE), CITY OF BELLEVUE AMENDMENTS, AND MANUFACTURER REQUIREMENTS. CONTRACTOR SHALL PROVIDE COMPLETE RESTORATION OF ALL DISTURBED AREAS INCLUDING SLABS, FLOORING, WALLS, CEILINGS, AND FINISHES TO MATCH EXISTING CONDITIONS. TEST AND INSPECT ALL SYSTEMS PRIOR TO CONCEALMENT AND PROVIDE AS-BUILT DOCUMENTATION UPON COMPLETION.

PLUMBING GENERAL NOTES (WASTE)

- NOT ALL KEYNOTES MAY BE USED.
- SEE CORRESPONDING RISER DIAGRAM FOR SIZING.

PLUMBING KEYNOTES (WASTE)

1. 4" TO 6" WASTE, WITH 2-WAY SURFACE CLEANOUT, SLOPE 1/4" PER FOOT. TIE TO EXISTING 8" WASTE, FIELD VERIFY EXISTING CONDITIONS.
2. (E) WATER CLOSET, (N) 1/2" DCW, 3" W, 2" V. FLOOR-MOUNTED
3. (E) WATER CLOSET, (N) 1/2" DCW, 4" W, 2" V. WALL-MOUNTED
4. (E) LAVATORY, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V. 1 1/4 TRAP
5. (E) KITCHEN SINK, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V. DOUBLE-BOWL
6. (E) SHOWER, (N) 1/2" DCW, 1/2" DHW, 2" FD WITH 2" W, 1 1/2" V. INSTALL PRESSURE-BALANCED OR THERMOSTATIC MIXING VALVE.
7. (E) TUB, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
8. (E) DISHWASHER, (N) 1/2" DHW, PROVIDE APPROVED TEE WITH AIR GAP, AIR GAP MUST BE INSTALLED WITH THE FLOOD LEVEL MARKING AT OR ABOVE THE FLOOD LEVEL RIM OF THE SINK OR DRAINBOARD WHICHEVER IS HIGHER.
9. (E) SINK, (N) 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
10. SERVICE SINK (FBO), 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
11. 3" FD WITH 3" W, 2" V. PROVIDE PROSET TRAP GUARD INSERT.
12. PIPING UP FROM UNDER FOUNDATION.
13. WASHING MACHINE BOX (WB), 3/4" DCW, 3/4" DHW, 2" W, 1 1/2" V.
14. (E) BIDET, 1/2" DCW, 1/2" DHW, 2" W, 1 1/2" V.
15. (E) URINAL, 3/4" DCW, 2" W, 1 1/2" V.
16. PIPING UP TO ADJACENT FLOOR.

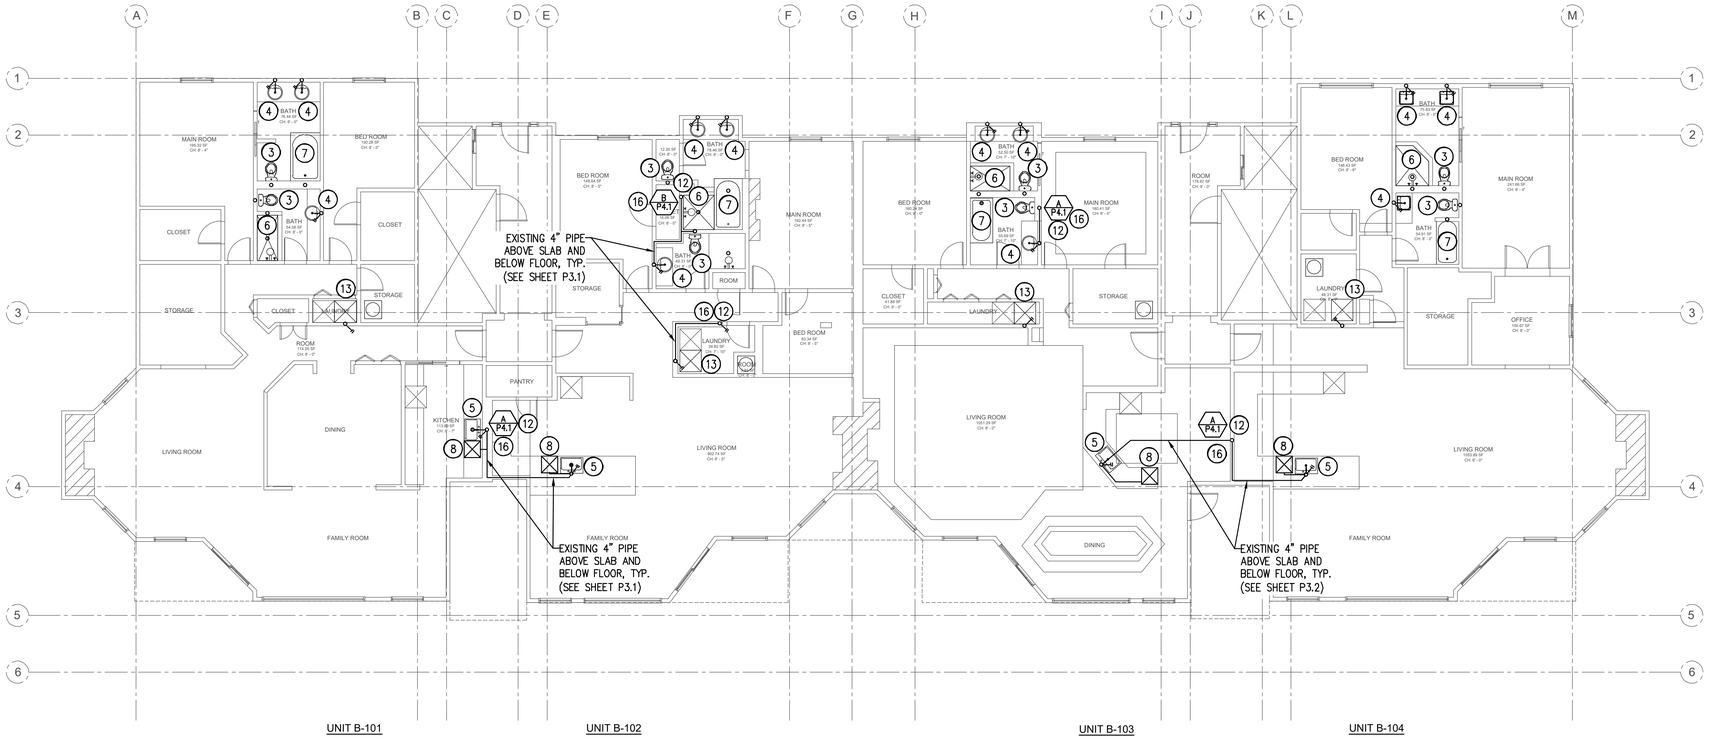

1 **FIRST FLOOR WASTE PLUMBING PLAN**
SCALE: 1/8" = 1'

PHSKC STAMP

"KE | AD"
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERNST H. SCHUETTE — STATE OF WASHINGTON — 22966 — REGISTERED PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
BUILDING 'B'
FIRST FLOOR
WASTE
PLUMBING PLAN

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P2.1

SCALE: 1/8"=1'

© 2025 KE | AD, LLC

CONSTRUCTION NOTES:

ALL EXISTING ROOF ELEMENTS, INCLUDING BUT NOT LIMITED TO ROOF MEMBRANE, INSULATION, DECKING,STRUCTURAL FRAMING, PARAPETS, FLASHING, SCUPPERS, ROOF DRAINS, OVERFLOW DRAINS, VENT THROUGH-ROOF (VTR) TERMINATIONS, DOWNSPOUTS, CURBS, EQUIPMENT SUPPORTS, AND PENETRATIONS SHALL REMAIN UNLESS SPECIFICALLY NOTED OTHERWISE ON THE DRAWINGS.


PROTECT ALL EXISTING ROOFING SYSTEMS AND PENETRATIONS DURING CONSTRUCTION. ANY DAMAGE TO ROOFING, FLASHING, OR WATERPROOFING SYSTEMS RESULTING FROM CONSTRUCTION ACTIVITIES SHALL BE REPAIRED OR REPLACED TO MATCH EXISTING MATERIALS AND MAINTAIN FULL WEATHER-TIGHT INTEGRITY.

NO NEW ROOF PENETRATIONS SHALL BE MADE EXCEPT WHERE EXPLICITLY INDICATED ON THE DRAWINGS. COORDINATE ALL WORK WITH ARCHITECTURAL AND ROOFING REQUIREMENTS. MAINTAIN ALL EXISTING DRAINAGE PATTERNS AND DO NOT ALTER ROOF SLOPES OR DRAINAGE PERFORMANCE.

ALL WORK SHALL COMPLY WITH THE CITY OF BELLEVUE REQUIREMENTS AND APPLICABLE WASHINGTON STATE CODES.

ROOF DRAIN CALCULATIONS

RAINFALL RATE:	2"/HR
TOTAL ROOF AREA BLDG. B:	8,345 S.F.
NUMBER OF DOWNSPOUTS:	10
SIZE OF DOWNSPOUTS:	6"

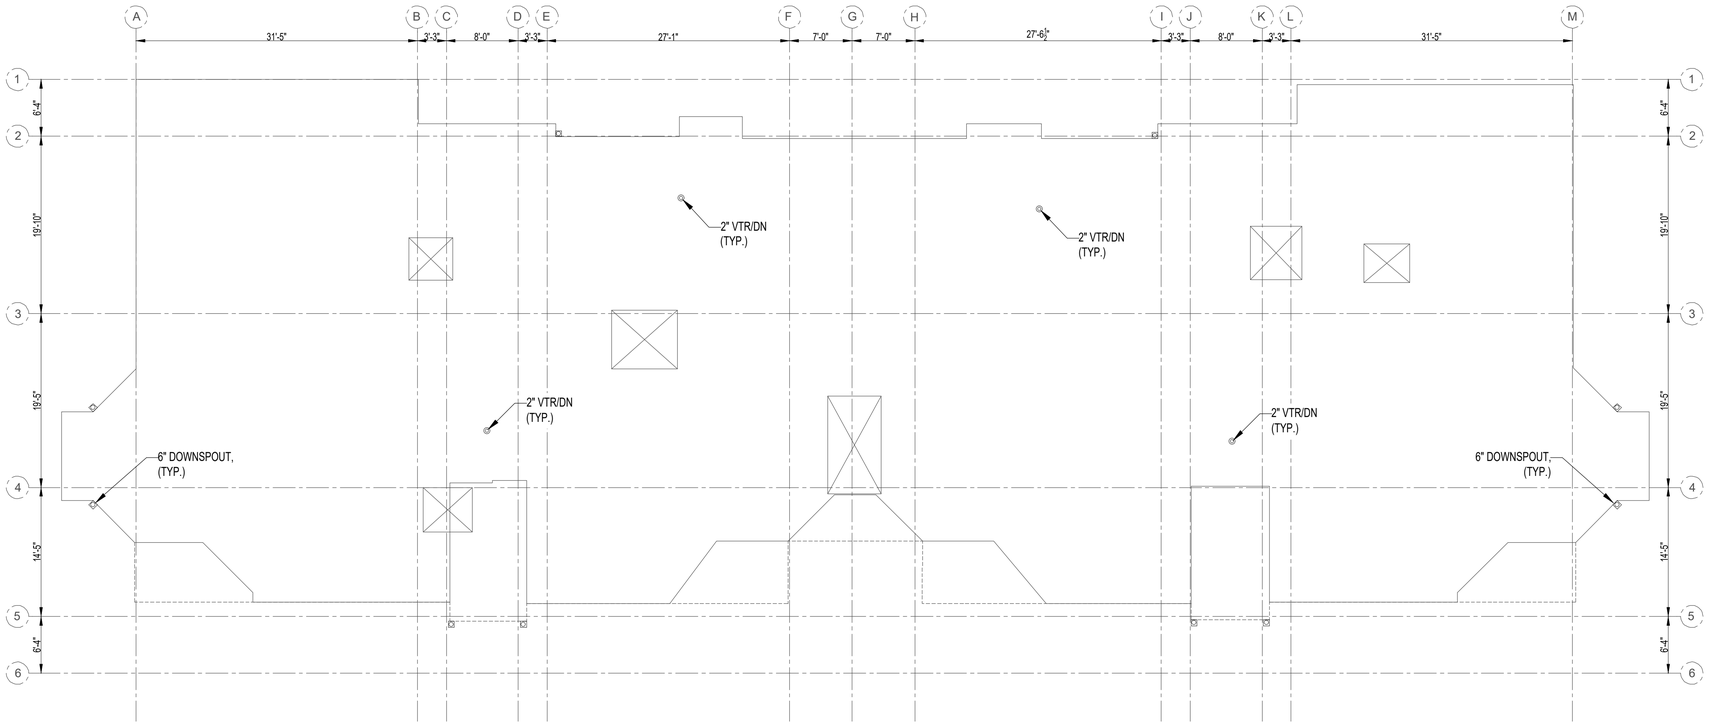

1 ROOF PLUMBING PLAN

SCALE: 1/8" = 1'

NORTH

PHSKC STAMP

"KE | AD"

HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000

SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERIC H. SCHLEIN — STATE OF WASHINGTON — 23966 — REGISTERED PROFESSIONAL ENGINEER

EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
BUILDING 'B'
ROOF
PLUMBING PLAN

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048


REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P2.2

SCALE: 1/8"=1'

© 2025 KE | AD, LLC

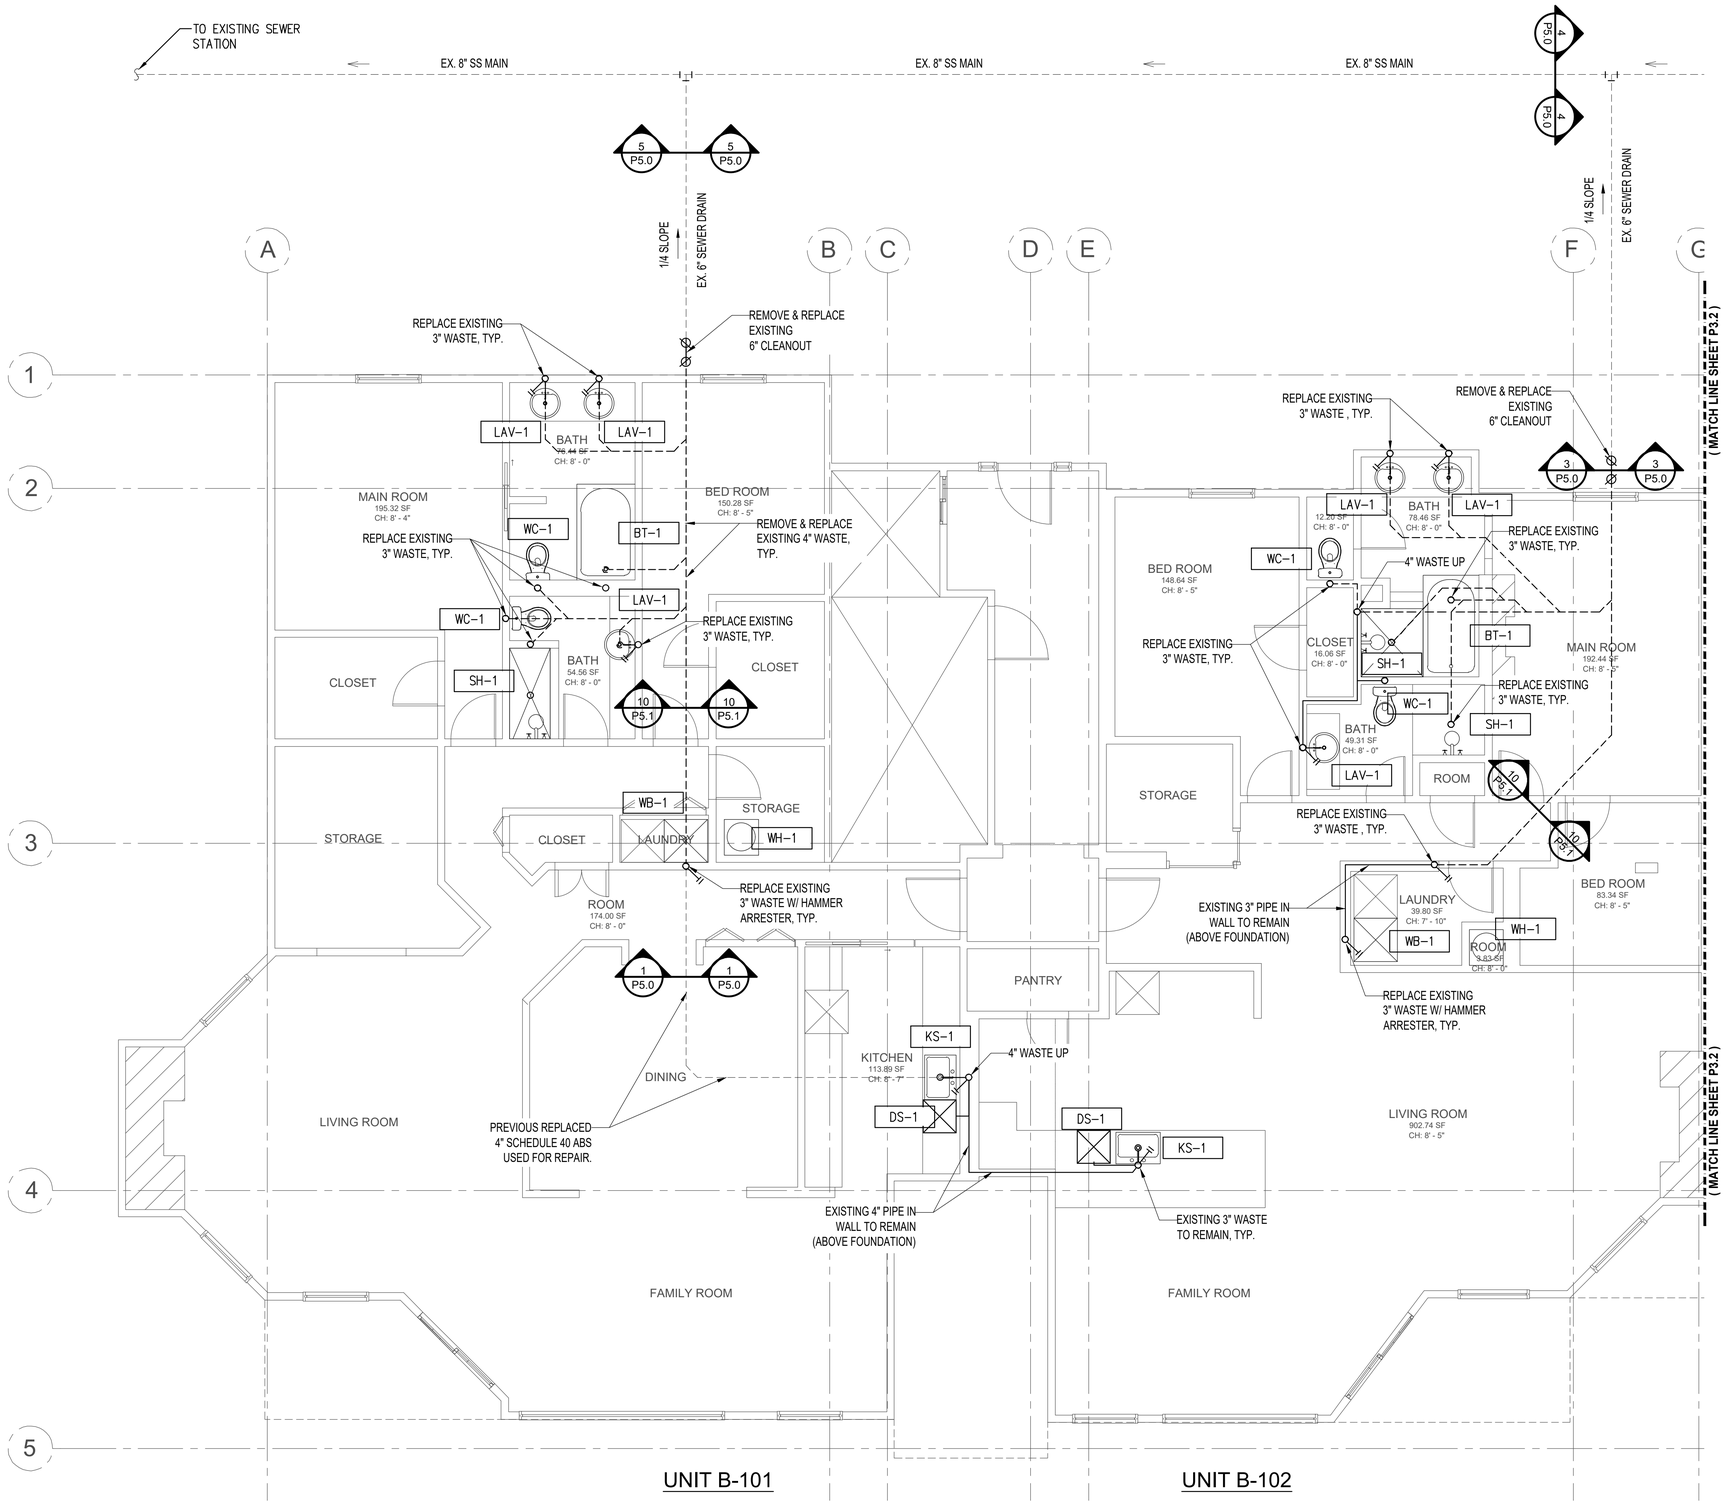

1 UNIT B-101 & B-102 ENLARGED PLAN

NORTH

FIXTURE LEGEND:

LAV–1	LAVATORY
WC–1	WATER CLOSET
BT–1	BATH TUB
SH–1	SHOWER
KS–1	KITCHEN SINK
WB–1	WASHER BOX
WH–1	WATER HEATER
DS–1	DISHWASHER

LEGEND

- GRID LINE
- EXISTING PIPE UNDER FOUNDATION
- EXISTING PIPE ABOVE FOUNDATION
- WALL

PHSKC STAMP

"KE | AD"
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERNST H. SCHUMANN — STATE OF WASHINGTON — 22986 — REGISTERED PROFESSIONAL ENGINEER

EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
BUILDING 'B'
UNIT B-101 & B-102
ENLARGED
PLUMBING PLAN

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P3.1

SCALE: 1/4"=1'


© 2025 KE | AD, LLC

FIXTURE LEGEND:

LAV–1	LAVATORY
WC–1	WATER CLOSET
BT–1	BATH TUB
SH–1	SHOWER
KS–1	KITCHEN SINK
WB–1	WASHER BOX
WH–1	WATER HEATER
DS–1	DISHWASHER

LEGEND

- GRID LINE
- EXISTING PIPE UNDER FOUNDATION
- EXISTING PIPE ABOVE FOUNDATION
- WALL

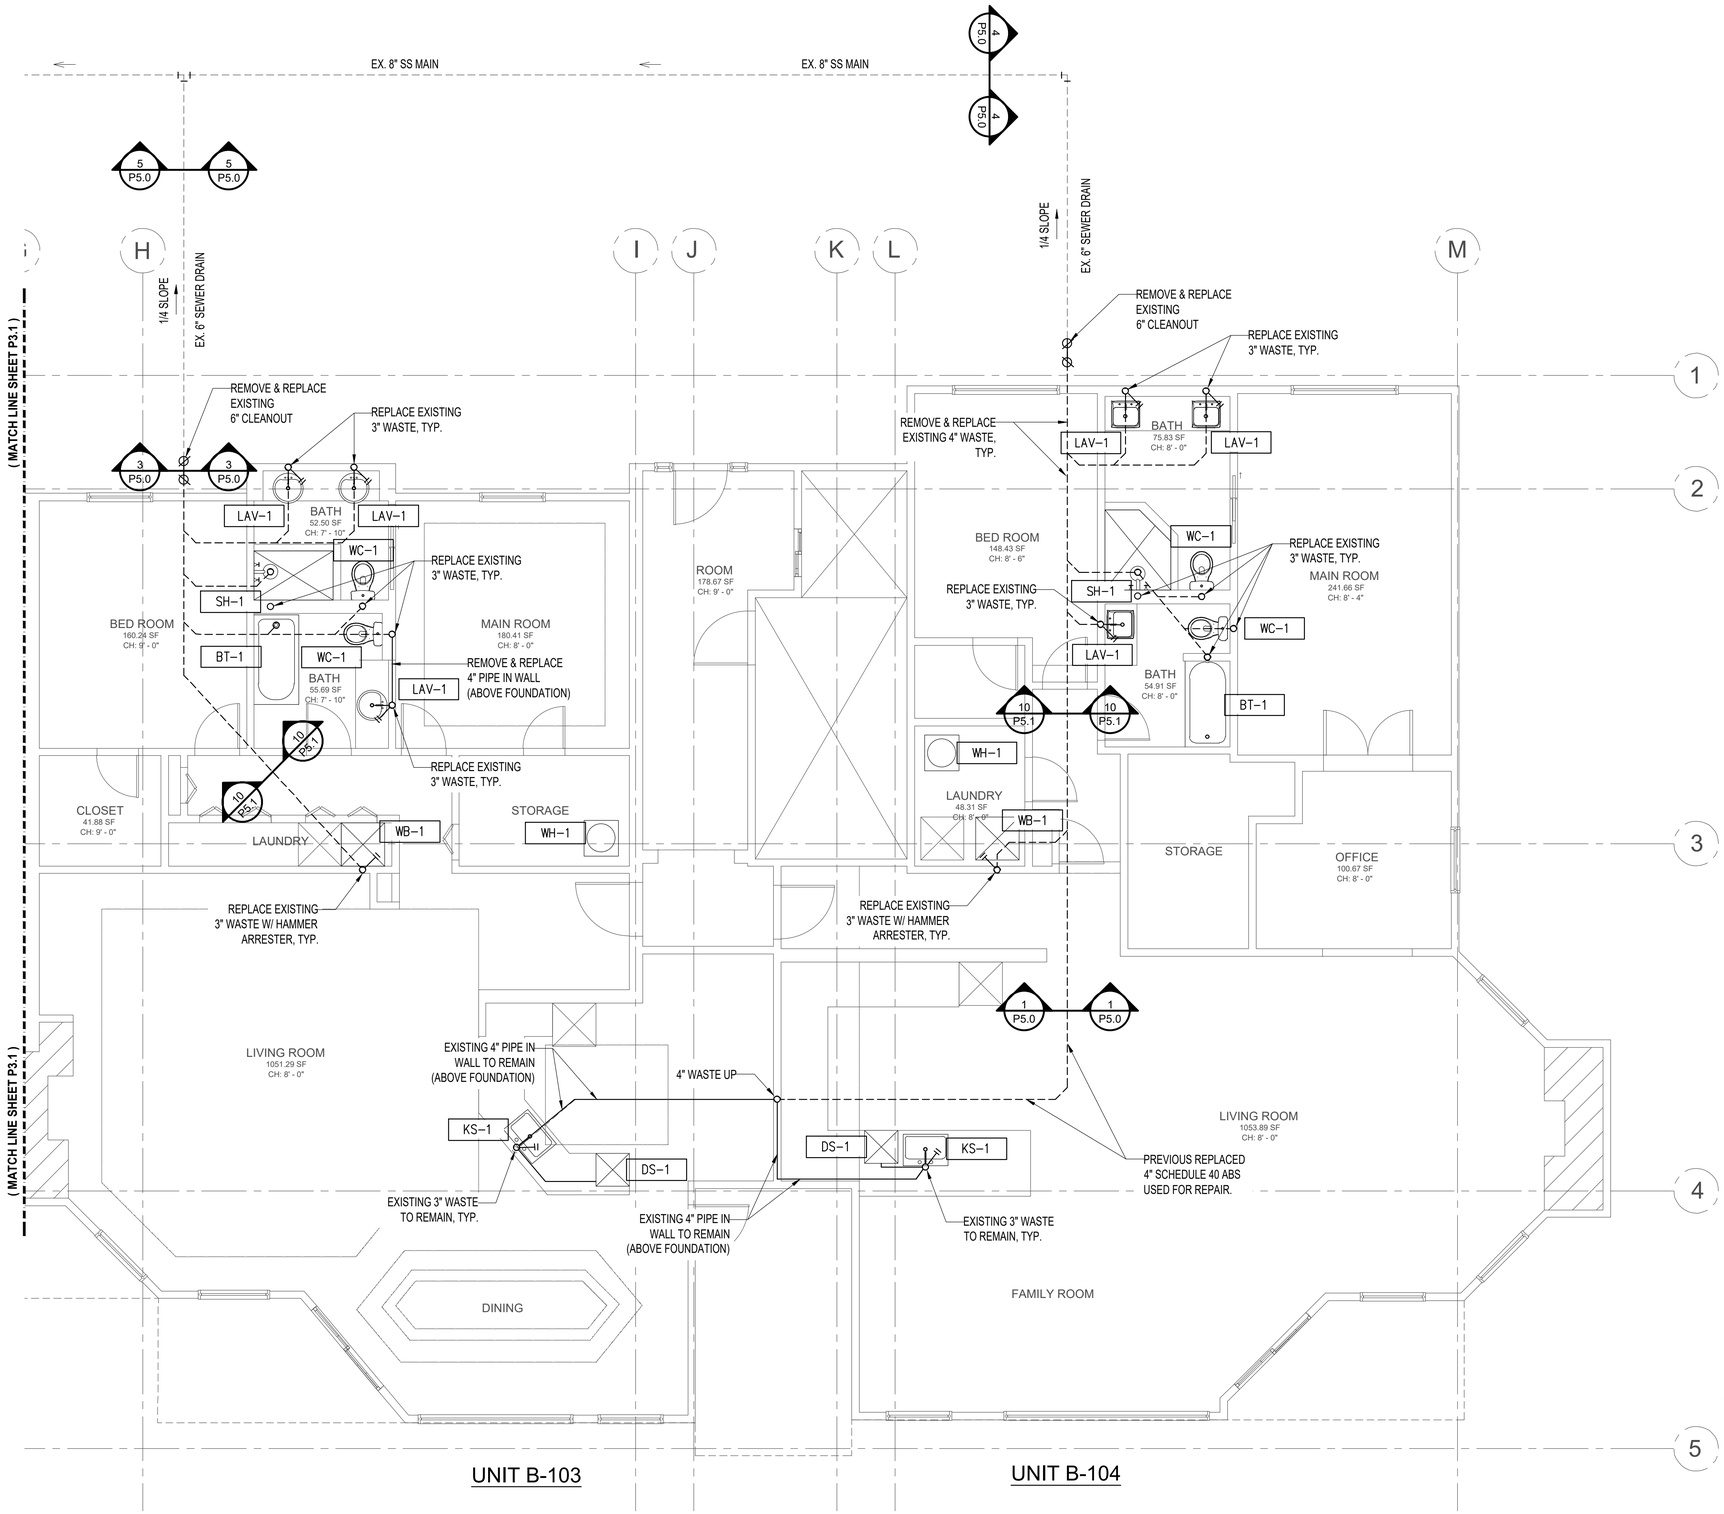

1 UNIT B-103 & B-104 ENLARGED PLAN

SCALE: 1/4" = 1'

NORTH

PHSKC STAMP

"KE | AD"

HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000

SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

FRANK H. SCHUMAN — STATE OF WASHINGTON — 22986 — REGISTERED PROFESSIONAL ENGINEER

EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 6390000-0000

SHEET CONTENTS:
BUILDING 'B'
UNIT B-103 & B-104
ENLARGED
PLUMBING PLAN

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048


REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P3.2

SCALE: 1/4"=1'

© 2025 KE | AD, LLC

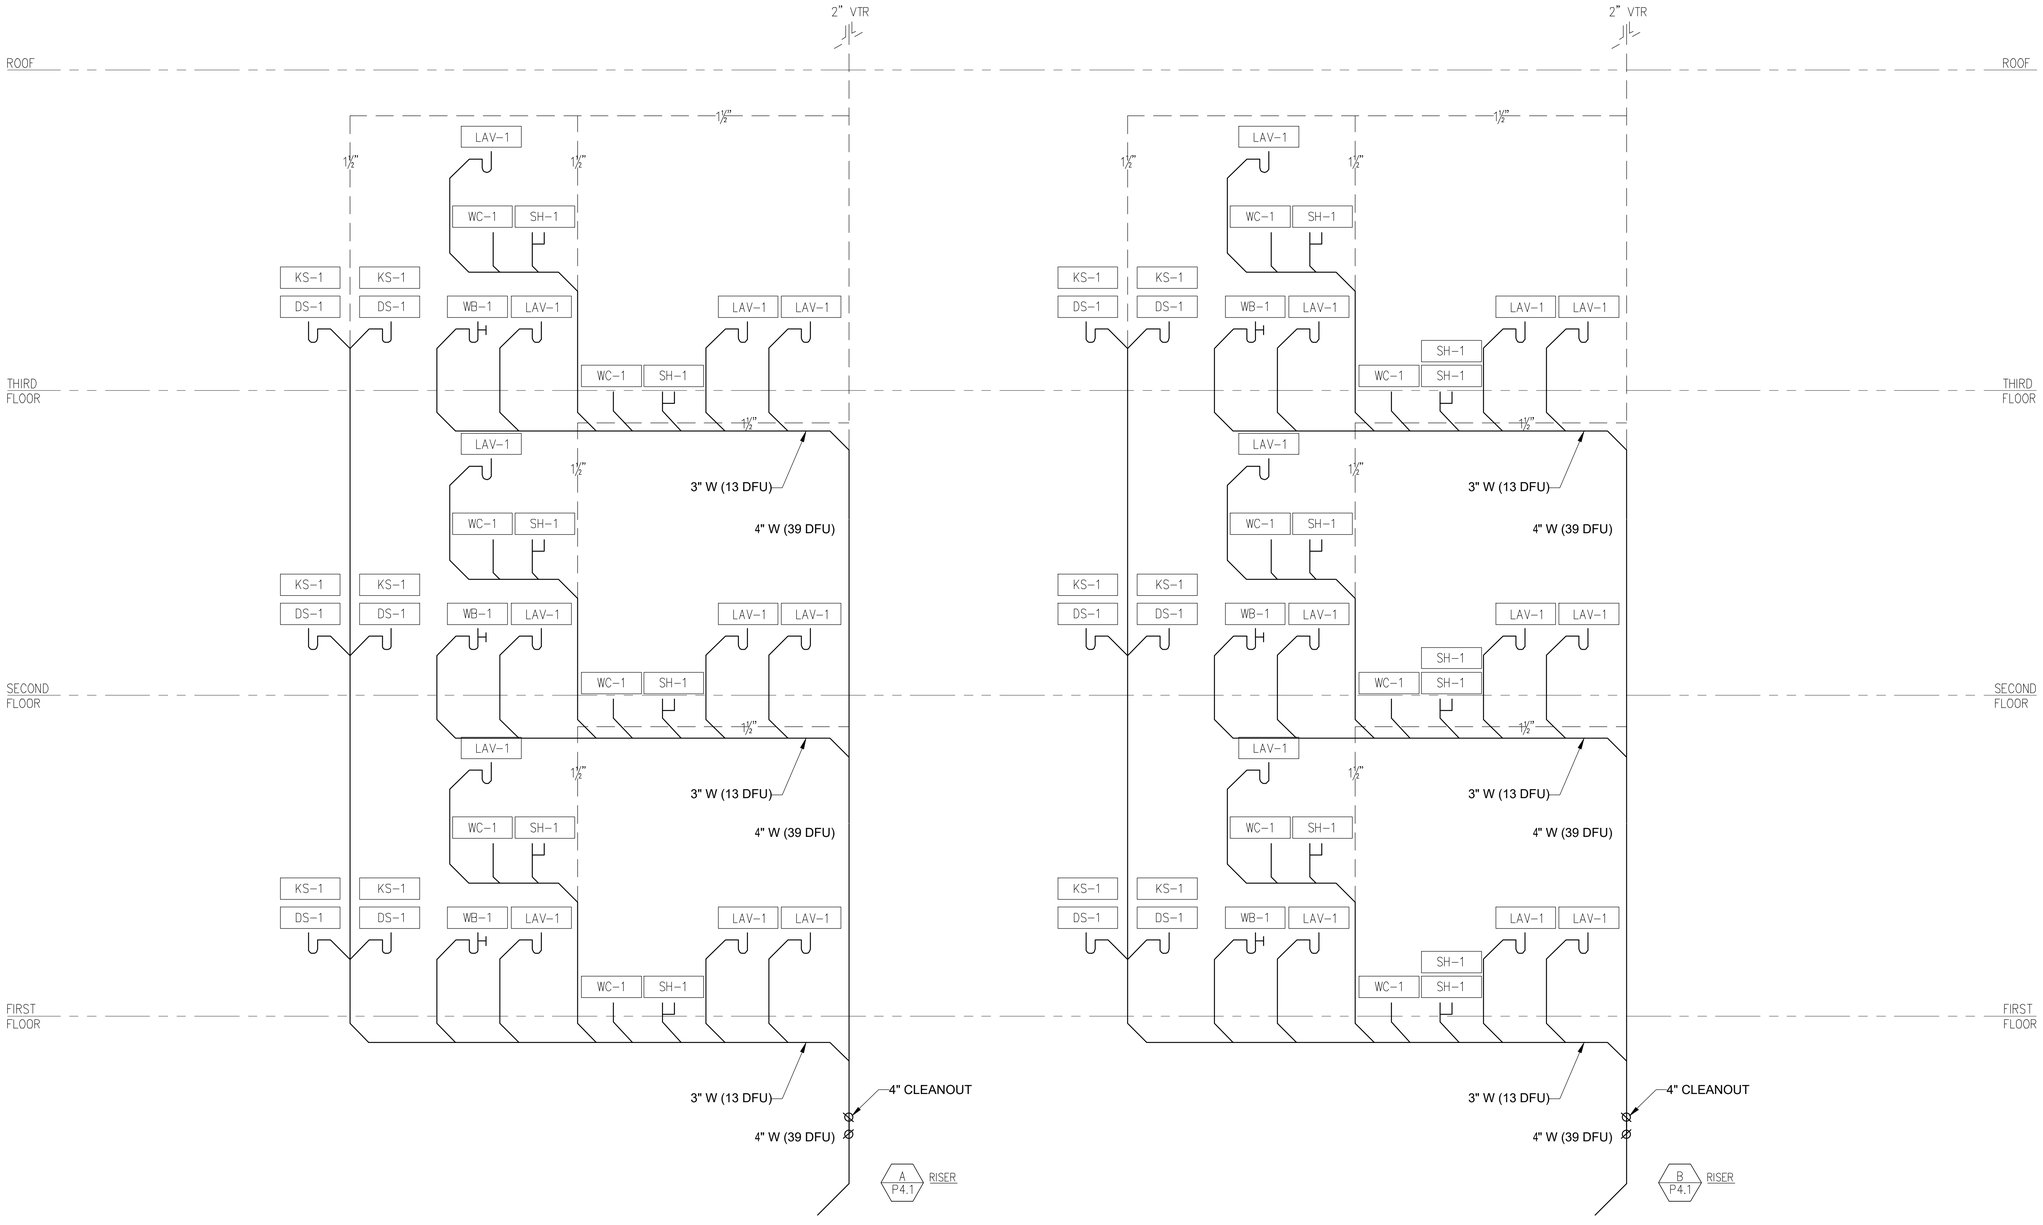

1 WASTE & VENT RISER DIAGRAM

SCALE: 1" = 1'-0"

PHSKC STAMP

"KE | AD"

HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000

SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERIC H. SCHLEIF — STATE OF WASHINGTON — 22966 — REGISTERED PROFESSIONAL ENGINEER

EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
WASTE & VENT
BUILDING B
RISER DIAGRAMS

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048


REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P4.1

SCALE: 1"=1'-0"

© 2025 KE | AD, LLC

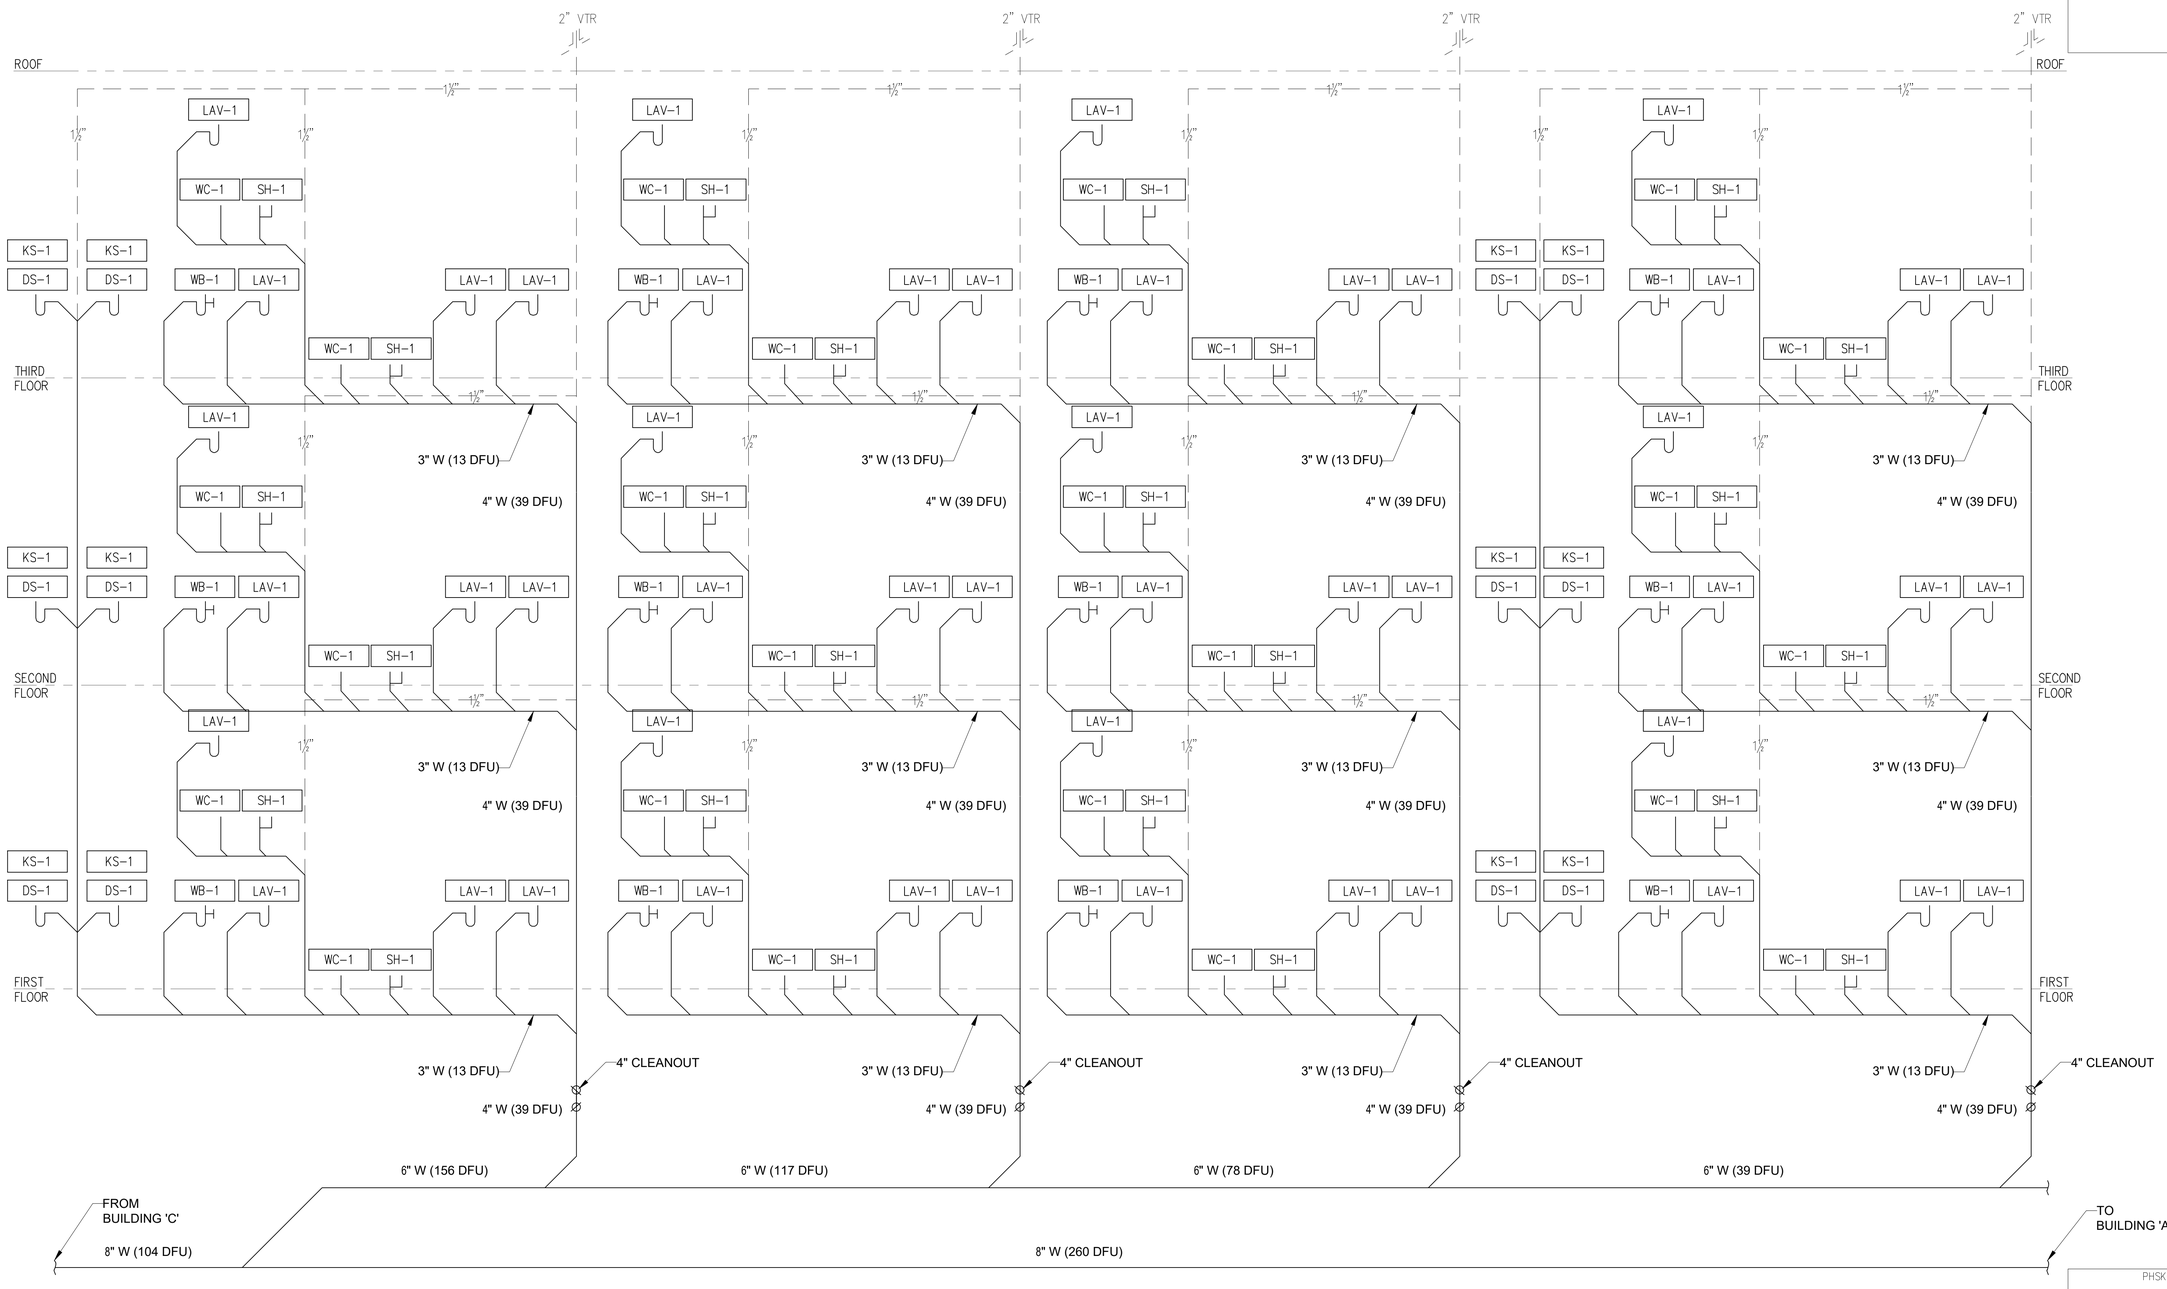

1 WASTE & VENT RISER DIAGRAM

SCALE: 1" = 1'-0"

PHSKC STAMP

"KE | AD"
KE|AD
BELLINGHAM | SEATTLE | TAMPA
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

FRED H. SCHUTTE
STATE OF WASHINGTON
20996
REGISTERED
PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
FIRST FLOOR
WASTE & VENT
BUILDING B
RISER DIAGRAMS

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048


REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET


P4.2

SCALE: 1"=1'-0"

© 2025 KE | AD, LLC

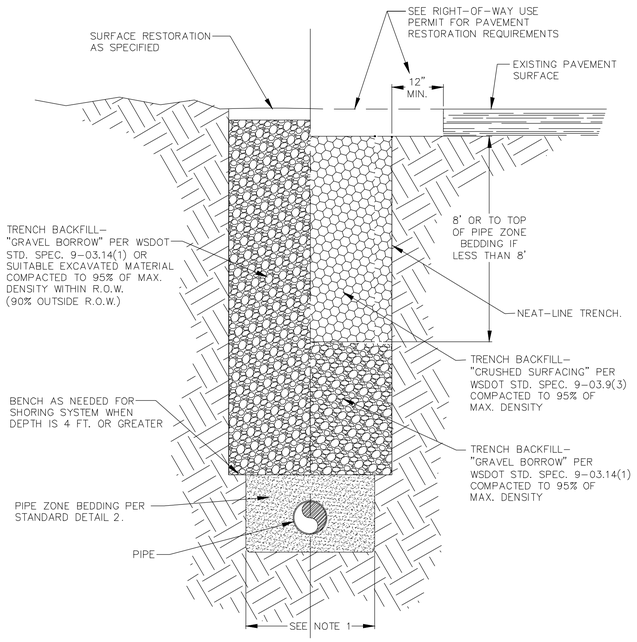


1 TYPICAL TRENCH DETAIL
SCALE: 1/4" = 1'-0"

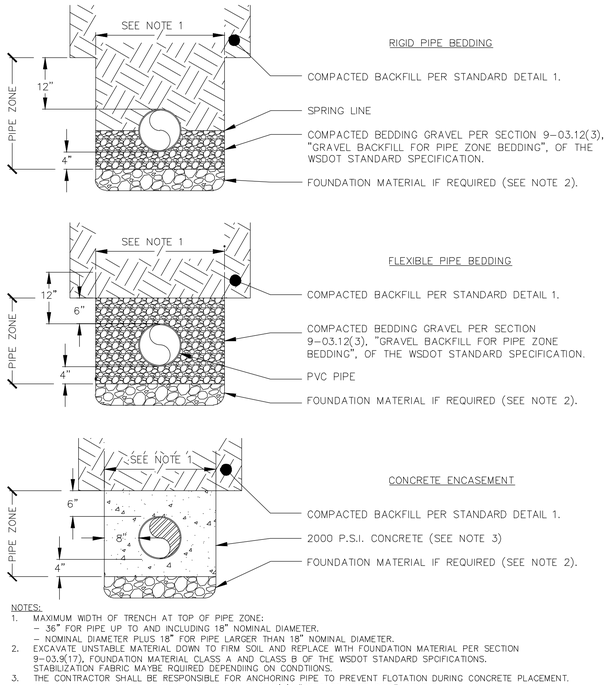

NOTES:
1. MAXIMUM WIDTH OF TRENCH AT TOP OF PIPE ZONE:
   - 36" FOR PIPE UP TO AND INCLUDING 18" NOMINAL DIAMETER.
   - NOMINAL DIAMETER PLUS 18" FOR PIPE LARGER THAN 18" NOMINAL DIAMETER.
2. EXCAVATE UNSTABLE MATERIAL DOWN TO FIRM SOIL AND REPLACE WITH FOUNDATION MATERIAL PER SECTION 9-03.9(17). FOUNDATION MATERIAL CLASS A AND CLASS B OF THE WSDOT STANDARD SPCIFICATIONS. STABILIZATION FABRIC MAYBE RQUIRED DEPENDIING ON CONDTIIONS.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANCHORING PIPE TO PREVENT FLOTATION DURING CONCRETE PLACEMENT.
4. COMPACTED CRUSHED SURFACING PER SECTION 9-03.9(3), "CRUSHED SURFACING", OF THE WSDOT STANDARD SPECIFICATIONS CAN ALSO BE USED AS BEDDING GRAVEL.


2 BEDDING DETAIL
SCALE: 1/4" = 1'-0"

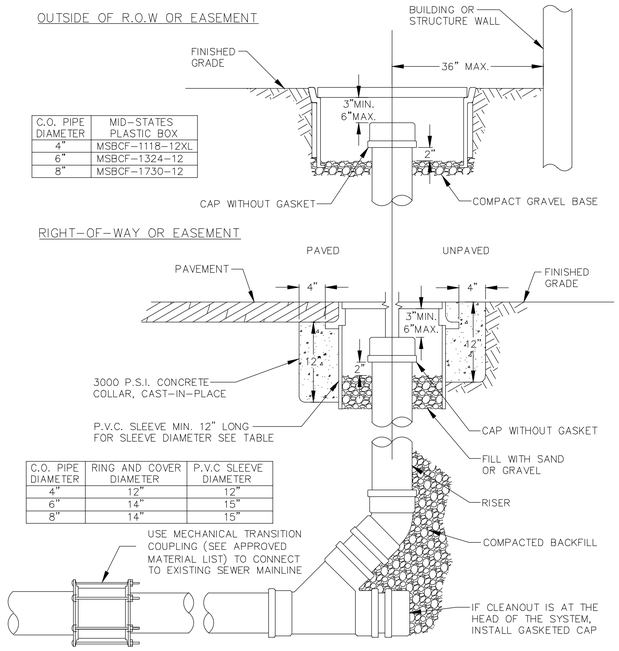


C.O. PIPE DIAMETER	MID-STATES PLASTIC BOX
4"	MSBCF-1118-12XL
6"	MSBCF-1324-12
8"	MSBCF-1730-12

C.O. PIPE DIAMETER	RING AND COVER DIAMETER	P.V.C SLEEVE DIAMETER
4"	12"	12"
6"	14"	15"
8"	14"	15"

3 CLEANOUT TO GRADE DETAIL
SCALE: 1/4" = 1'-0"

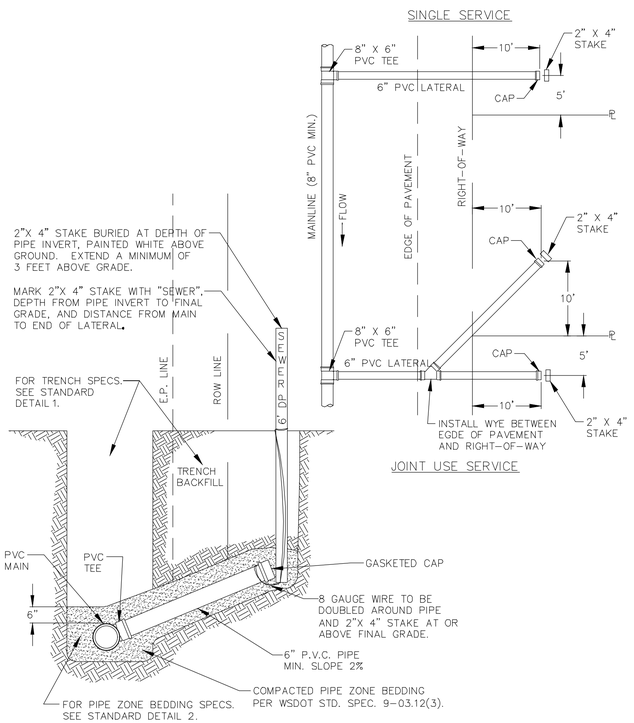

4 SIDE SEWER LATERAL ON EXISITNG, NEW AND NON PVC MAIN DETAIL
SCALE: 1/4" = 1'-0"

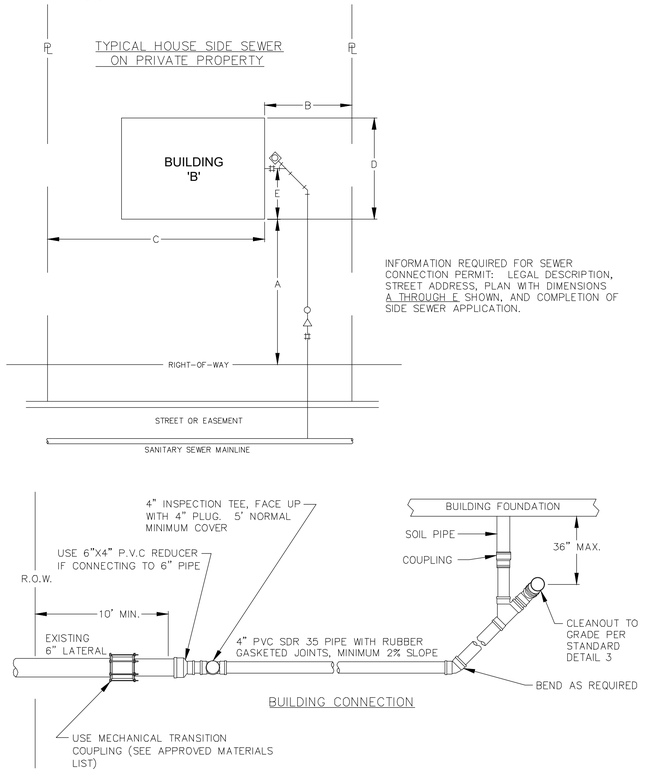

5 BUILDING SEWER CONNECTION DETAIL
SCALE: 1/4" = 1'-0"

GENERAL NOTES:

ALL WORK SHALL COMPLY WITH THE FOLLOWING CODES AS ADOPTED AND AMENDED BY THE CITY OF BELLEVUE AND THE STATE OF WASHINGTON:

- NATIONAL ELECTRICAL CODE (NEC 2023)
- INTERNATIONAL MECHANICAL CODE (IMC 2021)
- INTERNATIONAL BUILDING CODE (IBC 2021)
- APPLICABLE WASHINGTON ADMINISTRATIVE CODE (WAC) AMENDMENTS
- MANUFACTURER INSTALLATION INSTRUCTIONS AND UL LISTINGS

ELECTRICAL – NEC GENERAL NOTES

PUMP DISCONNECT & MOTOR CIRCUITS:
PROVIDE A DEDICATED BRANCH CIRCUIT AND DISCONNECTING MEANS FOR EACH PUMP OR MOTOR IN ACCORDANCE WITH NEC ARTICLE DISCONNECTS SHALL BE LOCATED WITHIN SIGHT OF THE MOTOR OR AT AN APPROVED LOCATION PER NEC 430.102(B). CONDUCTORS, OVERCURRENT PROTECTION, GROUNDING, AND BONDING SHALL COMPLY WITH NEC CHAPTERS 2 AND 4.

MOTOR STARTERS & PROTECTION:
PROVIDE MOTOR STARTERS, CONTROLLERS, AND OVERLOAD PROTECTION AS REQUIRED BY NEC ARTICLE 430. MOTOR CONTROL EQUIPMENT SHALL BE ACCESSIBLE AND COORDINATED WITH ELECTRICAL PANEL SCHEDULES.

LIGHTING & RECEPTACLES:
PROVIDE LIGHTING AND CONVENIENCE RECEPTACLES IN MECHANICAL AND EQUIPMENT ROOMS PER NEC ARTICLE 210. GFCI PROTECTION SHALL BE PROVIDED WHERE REQUIRED BY NEC 210.8. MAINTAIN REQUIRED WORKING CLEARANCES AROUND ELECTRICAL EQUIPMENT PER NEC 110.26.

MECHANICAL – IMC GENERAL NOTES

MECHANICAL ROOM VENTILATION:
MECHANICAL ROOMS AND SPACES CONTAINING EQUIPMENT SHALL BE VENTILATED IN ACCORDANCE WITH IMC CHAPTER 4. PROVIDE MECHANICAL OR NATURAL VENTILATION AS REQUIRED TO MAINTAIN SAFE OPERATING CONDITIONS AND INDOOR AIR QUALITY.

EQUIPMENT CLEARANCES:
MAINTAIN MINIMUM CLEARANCES AROUND MECHANICAL EQUIPMENT FOR OPERATION, SERVICE, AND MAINTENANCE IN ACCORDANCE WITH IMC AND IBC REQUIREMENTS, AND MANUFACTURER INSTALLATION INSTRUCTIONS.

BUILDING / STRUCTURAL – IBC GENERAL NOTES

FIRESTOPPING AT RATED ASSEMBLIES:
PENETRATIONS OF FIRE-RESISTANCE-RATED WALLS, FLOORS, OR CEILINGS SHALL BE PROTECTED USING UL-LISTED THROUGH-PENETRATION FIRESTOP SYSTEMS TESTED IN ACCORDANCE WITH ASTM E814 / UL 1479. FIRESTOP SYSTEMS SHALL BE INSTALLED PER MANUFACTURER INSTRUCTIONS AND SHALL MAINTAIN THE REQUIRED FIRE-RESISTANCE RATING PER IBC CHAPTER 7.

SEISMIC RESTRAINT:
PIPING, PLUMBING, AND MECHANICAL EQUIPMENT SHALL BE BRACED AND ANCHORED TO RESIST SEISMIC FORCES IN ACCORDANCE WITH IBC CHAPTER 16 AND ASCE 7 REQUIREMENTS. SEISMIC RESTRAINT DETAILS SHALL BE COORDINATED WITH STRUCTURAL DESIGN AND MANUFACTURER RECOMMENDATIONS.

BACKFILL REQUIREMENTS:

ALL TRENCH BACKFILL ASSOCIATED WITH UNDERGROUND PLUMBING WORK SHALL COMPLY WITH THE FOLLOWING REQUIREMENTS:

1. SUBGRADE PREPARATION
   REMOVE ALL LOOSE, SOFT, OR UNSUITABLE MATERIAL FROM THE TRENCH PRIOR TO BACKFILL. OVER-EXCAVATE AND REPLACE UNSUITABLE SOILS WITH APPROVED STRUCTURAL FILL AS DIRECTED BY THE ENGINEER.
2. BEDDING MATERIAL
   PROVIDE A MINIMUM OF 4–6 INCHES OF APPROVED BEDDING MATERIAL (SAND OR 3/8" MINUS CRUSHED ROCK) BENEATH ALL PIPING. BEDDING SHALL BE HAND-TAMPED AND GRADED TO PROVIDE UNIFORM SUPPORT ALONG THE FULL LENGTH OF PIPE.
3. PIPE ZONE BACKFILL
   FROM THE BOTTOM OF THE TRENCH TO 12 INCHES ABOVE THE TOP OF PIPE, USE SELECT GRANULAR MATERIAL FREE OF ROCKS LARGER THAN 3/4 INCH, ORGANIC MATTER, OR DEBRIS. PLACE AND COMPACT CAREFULLY TO AVOID DISPLACEMENT OR DAMAGE TO PIPING. HAND COMPACTION REQUIRED WITHIN THIS ZONE.
4. GENERAL BACKFILL (ABOVE PIPE ZONE)
   BACKFILL ABOVE THE PIPE ZONE MAY CONSIST OF NATIVE MATERIAL PROVIDED IT IS FREE OF DEBRIS, ORGANICS, FROZEN MATERIAL, AND ROCKS LARGER THAN 2 INCHES. WHERE NATIVE MATERIAL IS UNSUITABLE, PROVIDE IMPORTED STRUCTURAL FILL.
5. COMPACTION REQUIREMENTS
   PLACE BACKFILL IN MAXIMUM LIFTS OF 6–8 INCHES (LOOSE THICKNESS). COMPACT EACH LIFT TO: 90% OF MAXIMUM DRY DENSITY (ASTM D1557) FOR LANDSCAPED OR NON-STRUCTURAL AREAS. 95% OF MAXIMUM DRY DENSITY (ASTM D1557) FOR SLABS, PAVEMENTS, OR STRUCTURAL AREAS.
6. MOISTURE CONDITIONING
   ADJUST MOISTURE CONTENT AS NECESSARY TO ACHIEVE SPECIFIED COMPACTION. MATERIAL SHALL NOT BE PLACED IF EXCESSIVELY WET OR DRY.
7. PROTECTION OF WORK
   DO NOT OPERATE HEAVY EQUIPMENT DIRECTLY OVER PIPING UNTIL A MINIMUM OF 12 INCHES OF COMPACTED COVER IS IN PLACE. REPAIR OR REPLACE ANY DAMAGED PIPING AT NO ADDITIONAL COST.
8. TESTING AND INSPECTION
   COMPACTION TESTING SHALL BE PERFORMED BY A QUALIFIED TESTING AGENCY IF EQUIRED BY THE OWNER OR AUTHORITY HAVING JURISDICTION (AHJ). CONTRACTOR SHALL COORDINATE ALL REQUIRED INSPECTIONS.
9. SURFACE RESTORATION
   RESTORE ALL SLABS, PAVEMENTS, LANDSCAPING, AND FINISHES TO MATCH EXISTING CONDITIONS UNLESS OTHERWISE NOTED.

PHSKC STAMP

"KE | AD"
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

ERIC H. SCHLIEP — STATE OF WASHINGTON — REGISTERED PROFESSIONAL ENGINEER
EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
PLUMBING DETAILS

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048


REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET


P5.0

SCALE: 1'-0"=1"

© 2025 KE | AD, LLC

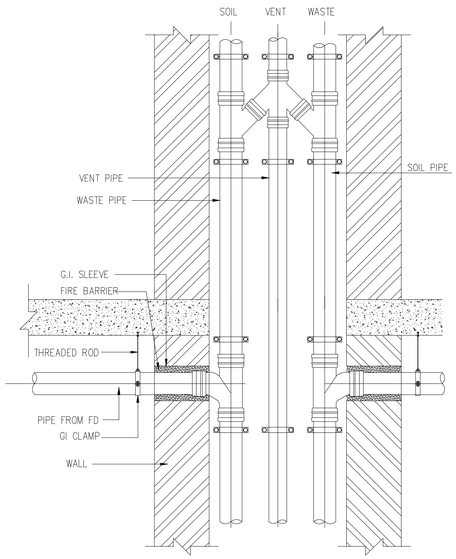


6 TYPICAL PIPE CONNECTION TO RISER DETAIL
SCALE: 1" = 1'-0"

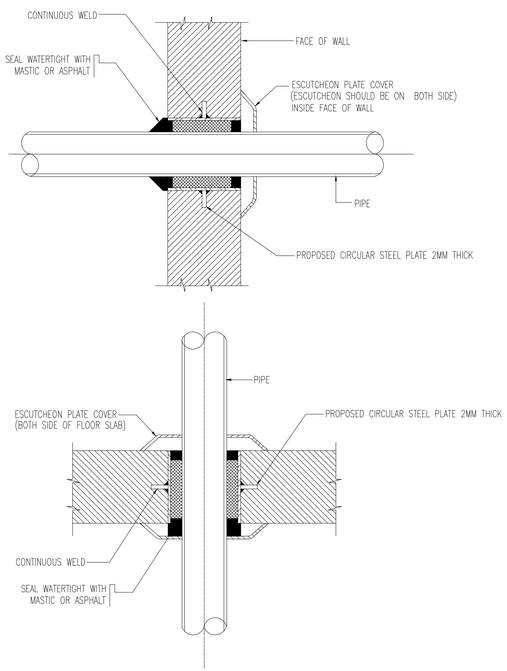


7 FLOOR & WALL FIRE-STOP PENETRATION
SCALE: 1" = 1'-0"


NOTE
PER SEATTLE PLUMBING CODE 711.0, SUDS RELIEF.
DRAINAGE CONNECTIONS SHALL NOT BE MADE INTO THE DRAINAGE PIPING SYSTEM WITHIN 8 FEET OF A VERTICAL TO HORIZONTAL CHANGE OF DIRECTION. WHERE PARALLEL VENT STACKS ARE REQUIRED, THEY SHALL CONNECT TO THE DRAINAGE STACK AT A POINT 8 FEET ABOVE THE LOWEST POINT OF THE DRAINAGE STACK.

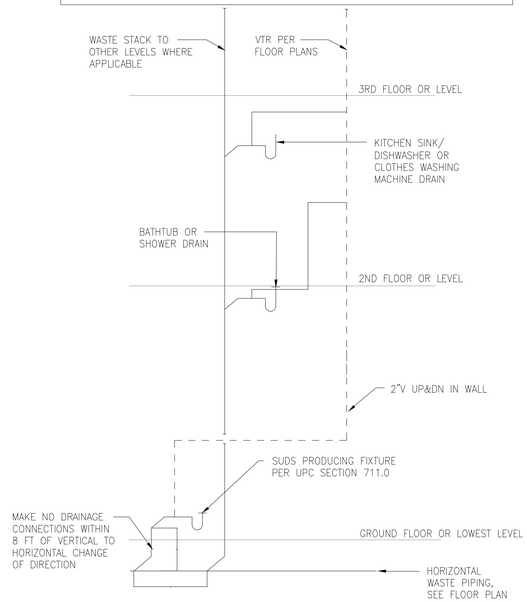

11 SUDS RELIEF DETAIL
SCALE: 1/4" = 1'-0"

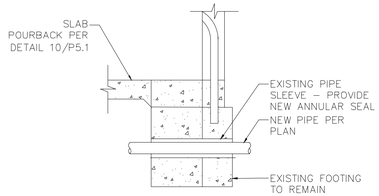


A-A SECTION DETAIL AT FOOTING

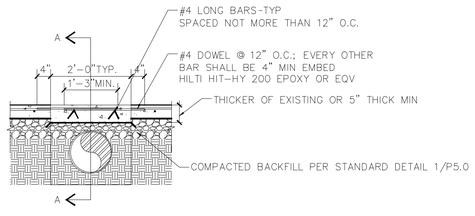

NOTES:
1.) CONCRETE SHALL BE 3000 PSI MIN AT 28 DAYS WITH MAX AGGREGATE SIZE OF 3/4". THE WATER TO CEMENT RATIO SHALL BE 0.45–0.50. CONCRETE MIX TO CONTAIN KRYTON KIM ADDITIVE OR EQUAL AT 13.5 LB/CY. MINIMUM CLEARANCE FOR STEEL REINFORCEMENT BARS SHALL BE 1 1/2". REINFORCING BARS SHALL BE ASTM A615 GRADE 60.
2.) PROTECT RADIANT FLOOR HEATING SYSTEMS WHERE PRESENT.

10 TRENCH INFILL DETAIL
SCALE: 1/4" = 1'-0"

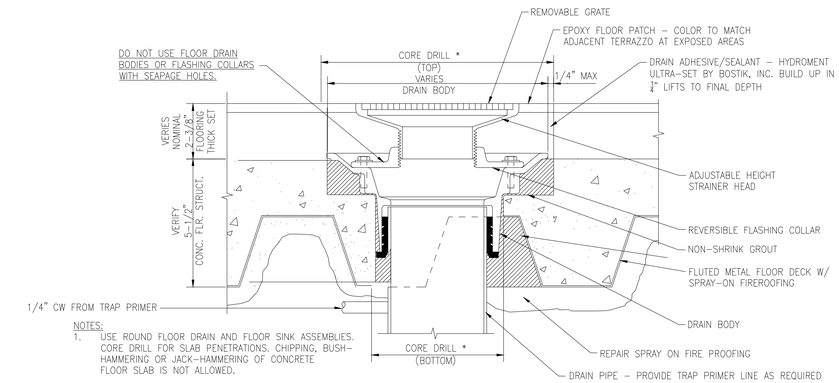

*CORE DRILL TWO HOLES TO PROVIDE SEAT FOR FLOOR DRAIN BODY

NOTES:
1. USE ROUND FLOOR DRAIN AND FLOOR SINK ASSEMBLIES. CORE DRILL FOR SLAB PENETRATIONS. CHIPPING, BUSH-HAMMERING OR JACK-HAMMERING OF CONCRETE FLOOR SLAB IS NOT ALLOWED.
2. AFTER PENETRATION IS COMPLETE, REPAIR FIRE PROOFING AT UNDERSIDE OF METAL FLOOR DECK.
3. FLOOR DRAINS AT OTHER FLOOR FINISHES AND SUB FLOORING SIMILAR.
4 ALL FLOOR DRAINS SHALL HAVE A TRAP PRIMER.

9 TYPICAL FLOOR DRAIN DETAIL
SCALE: 1/4" = 1'-0"

PHSKC STAMP

"KE | AD"
HAWAII OFFICE
677 Ala Moana Blvd., Ste. 703
Oahu, HI 96813
808-532-2000
SEATTLE OFFICE
11520 42nd Ave South
Tukwila, WA 98168
206-455-5121
www.kentengineering.com

EXP. 06/24/2026

PROJECT:
MEYDENBAUER CONDOMINIUMS
BUILDING B, UNITS B-101, B-102, B-103 & B-104
101 1ST AVENUE SOUTHEAST
BELLEVUE, WA 98004
PARCEL NUMBER: 639000-0000

SHEET CONTENTS:
PLUMBING DETAILS

DATE:	01-15-2026
DRAWN BY:	TD
CHECKED BY:	ES
PROJECT NO.:	25-048

REVISION(S)

Rev #	Issue Date	Description
1	03/02/2026	ADD DETAIL
2	08/31/2026	BID SET

P5.1

SCALE: 1'-0"=1"

© 2025 KE | AD, LLC